



# C3814 (EI 38)

3,5VA - Ta40°B

Dim:32x38x26,2mm




[www.efiter.com](http://www.efiter.com)

[home>>index](#)


## OPEN FRAME TRANSFORMERS

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection

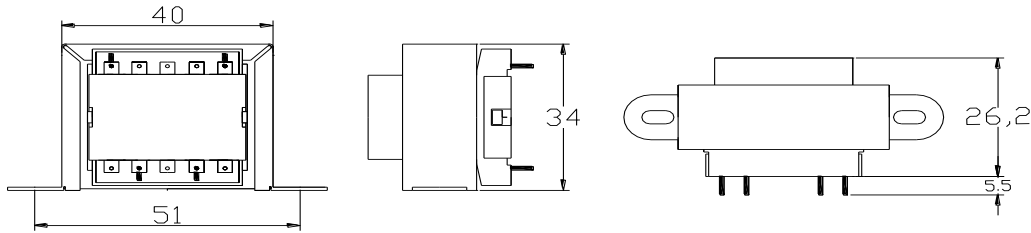


### SINGLE SECONDARY, 3,5VA. Ta=40°B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C3814014	C3814114	4,5V	0,778mA	800mA
C3814000	C3814100	6V	0,583mA	630mA
C3814002	C3814102	7,5V	0,467mA	500mA
C3814004	C3814104	9V	0,389mA	400mA
C3814006	C3814106	12V	0,292mA	315mA
C3814008	C3814108	15V	0,233mA	250mA
C3814010	C3814110	18V	0,194mA	200mA
C3814020	C3814120	20V	0,175mA	200mA
C3814012	C3814112	24V	0,146mA	160mA

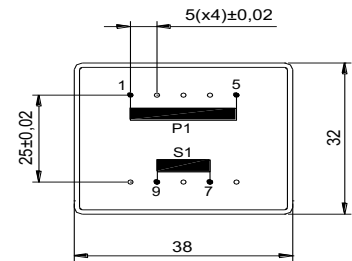


### DUAL SECONDARY, 3,5VA. Ta=40°B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C3814015	C3814115	2x4,5V	2x389mA	2x400mA
C3814001	C3814101	2x6V	2x292mA	2x315mA
C3814003	C3814103	2x7,5V	2x233mA	2x250mA </td
C3814005	C3814105	2x9V	2x194mA	2x200mA
C3814007	C3814107	2x12V	2x146mA	2x160mA
C3814009	C3814109	2x15V	2x117mA	2x125mA
C3814011	C3814111	2x18V	2x97mA	2x100mA
C3814019	C3814119	2x20V	2x88mA	2x100mA
C3814013	C3814113	2x24V	2x73mA	2x80mA

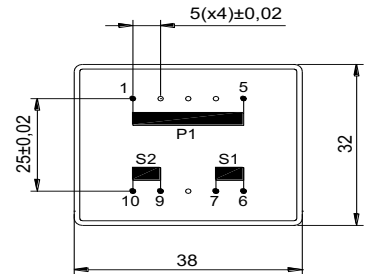

### CENTER TAPPED, 3,5VA. Ta=40°B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C3814035	C3814135	2x4,5V	2x389mA	2x400mA
C3814021	C3814121	2x6V	2x292mA	2x315mA
C3814023	C3814123	2x7,5V	2x233mA	2x250mA
C3814025	C3814125	2x9V	2x194mA	2x200mA
C3814027	C3814127	2x12V	2x146mA	2x160mA
C3814029	C3814129	2x15V	2x117mA	2x125mA
C3814031	C3814131	2x18V	2x97mA	2x100mA
C3814039	C3814139	2x20V	2x88mA	2x100mA
C3814033	C3814133	2x24V	2x73mA	2x80mA

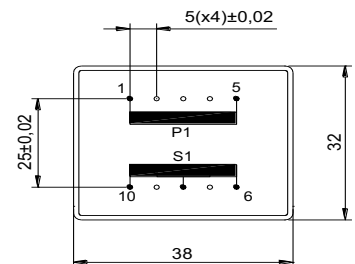

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085