



E2010 (EI 20/10,5)

0,6VA - Ta40°B

weight - 40gr.





www.efiter.com

[home>>index](#)


ENCAPSULATED TRANSFORMERS

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · Short circuit proof

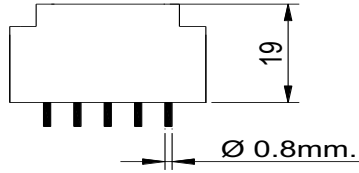


SINGLE SECONDARY, 0,6VA. Ta°40B

HR REFERENCE		Vo/Vsec=1,7 Vo → Is=0 Vsec → Isec=In		Protection
Prim. 230V	Prim. 115V	Vsec	Isec	
E2010014	E2010114	4,5V	133mA	Short circuit proof
E2010000	E2010100	6V	100mA	
E2010002	E2010102	7,5V	80mA	
E2010004	E2010104	9V	66mA	
E2010006	E2010106	12V	50mA	
E2010008	E2010108	15V	40mA	
E2010010	E2010110	18V	33mA	
E2010012	E2010112	24V	25mA	

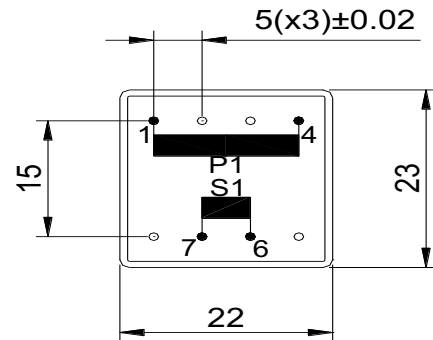

DUAL SECONDARY, 0,6VA. Ta°40B

HR REFERENCE		Vo/Vsec=1,7 Vo → Is=0 Vsec → Isec=In		Protection
Prim. 230V	Prim. 115V	Vsec	Isec	
E2010015	E2010115	2x4,5V	2x66mA	Short circuit proof
E2010001	E2010101	2x6V	2x50mA	
E2010003	E2010103	2x7,5V	2x40mA	
E2010005	E2010105	2x9V	2x33mA	
E2010007	E2010107	2x12V	2x25mA	
E2010009	E2010109	2x15V	2x20mA	
E2010011	E2010111	2x18V	2x16mA	
E2010013	E2010113	2x24V	2x12mA	

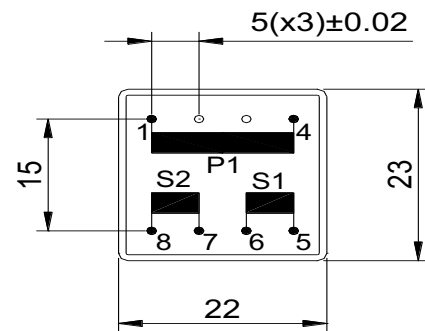

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 .