



# C3814 (EI 38)

3,0VA - Ta70°B

Dim:32x38x26,2mm




[www.efiter.com](http://www.efiter.com)

[home>>index](#)


## OPEN FRAME TRANSFORMERS

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection

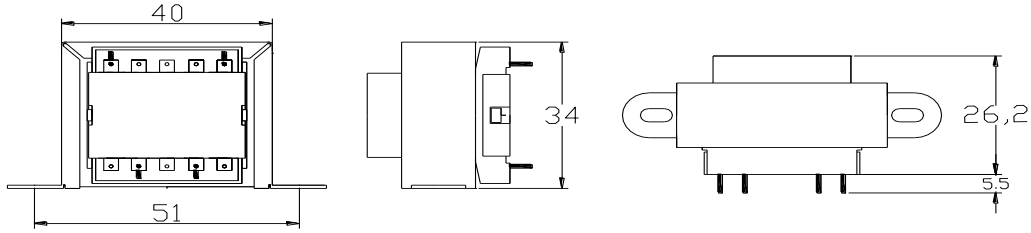


### SINGLE SECONDARY, 3,0VA. Ta70°B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C3814064	C3814164	4,5V	667mA	800mA
C3814050	C3814150	6V	500mA	630mA
C3814052	C3814152	7,5V	400mA	500mA
C3814054	C3814154	9V	333mA	400mA
C3814056	C3814156	12V	250mA	315mA
C3814058	C3814158	15V	200mA	250mA
C3814060	C3814160	18V	167mA	200mA
C3814070	C3814170	20V	150mA	200mA
C3814062	C3814172	24V	125mA	160mA

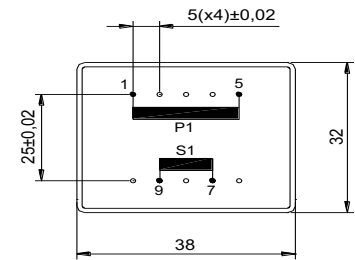


### DUAL SECONDARY, 3,0VA. Ta70°B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C3814065	C3814165	2x4,5V	2x333mA	2x400mA
C3814051	C3814151	2x6V	2x250mA	2x315mA
C3814053	C3814153	2x7,5V	2x200mA	2x250mA
C3814055	C3814155	2x9V	2x167mA	2x200mA
C3814057	C3814157	2x12V	2x125mA	2x160mA
C3814059	C3814159	2x15V	2x100mA	2x125mA
C3814061	C3814161	2x18V	2x83mA	2x100mA
C3814069	C3814169	2x20V	2x75mA	2x100mA
C3814063	C3814163	2x24V	2x63mA	2x80mA

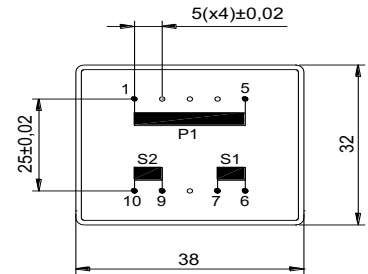

### CENTER TAPPED, 3,0VA. Ta70°B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C3814085	C3814185	2x4,5V	2x333mA	2x400mA
C3814071	C3814171	2x6V	2x250mA	2x315mA
C3814073	C3814173	2x7,5V	2x200mA	2x250mA
C3814075	C3814175	2x9V	2x167mA	2x200mA
C3814077	C3814177	2x12V	2x125mA	2x160mA
C3814079	C3814179	2x15V	2x100mA	2x125mA
C3814081	C3814181	2x18V	2x83mA	2x100mA
C3814089	C3814189	2x20V	2x75mA	2x100mA
C3814083	C3814183	2x24V	2x63mA	2x80mA

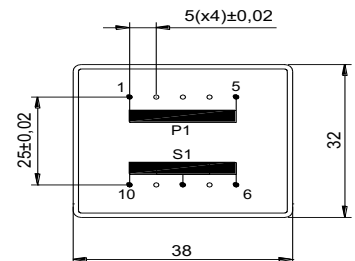

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085