



# C3820 (EI 38)

4VA - Ta70°B

Dim:32x38x33,2mm




www.efiter.com

home>>index


## OPEN FRAME TRANSFORMERS

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection

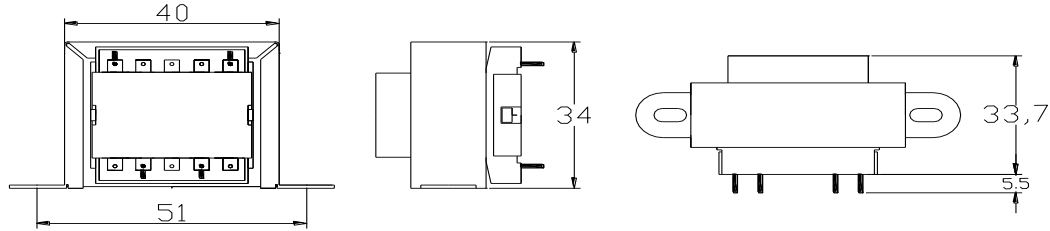


### SINGLE SECONDARY, 4,0VA. Ta°70B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C3820064	C3820164	4,5V	889mA	900mA
C3820050	C3820150	6V	667mA	700mA
C3820052	C3820152	7,5V	533mA	600mA
C3820054	C3820154	9V	444mA	500mA
C3820056	C3820156	12V	333mA	375mA
C3820058	C3820158	15V	267mA	300mA
C3820060	C3820160	18V	222mA	250mA
C3820070	C3820170	20V	200mA	250mA
C3820062	C3820172	24V	167mA	200mA

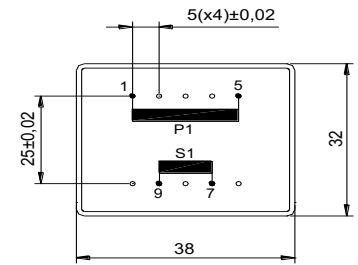


### DUAL SECONDARY, 4,0VA. Ta°70B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C3820065	C3820165	2x4,5V	2x444mA	2x500mA
C3820051	C3820151	2x6V	2x333mA	2x375mA
C3820053	C3820153	2x7,5V	2x267mA	2x300mA
C3820055	C3820155	2x9V	2x222mA	2x250mA
C3820057	C3820157	2x12V	2x167mA	2x200mA
C3820059	C3820159	2x15V	2x133mA	2x150mA
C3820061	C3820161	2x18V	2x111mA	2x125mA
C3820069	C3820169	2x20V	2x100mA	2x125mA
C3820063	C3820163	2x24V	2x83mA	2x100mA

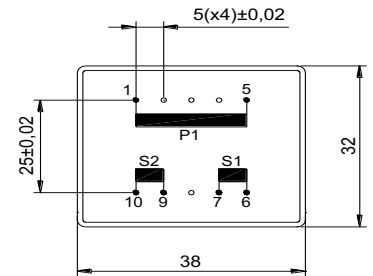

### CENTER TAPPED, 4,0VA. Ta°70B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C3825085	C3820185	2x4,5V	2x444mA	2x500mA
C3820071	C3820171	2x6V	2x333mA	2x375mA
C3820073	C3820173	2x7,5V	2x267mA	2x300mA
C3820075	C3820175	2x9V	2x222mA	2x250mA
C3820077	C3820177	2x12V	2x167mA	2x200mA
C3820079	C3820179	2x15V	2x133mA	2x150mA
C3820081	C3820181	2x18V	2x111mA	2x125mA
C3820089	C3820189	2x20V	2x100mA	2x125mA
C3820083	C3820183	2x24V	2x83mA	2x100mA

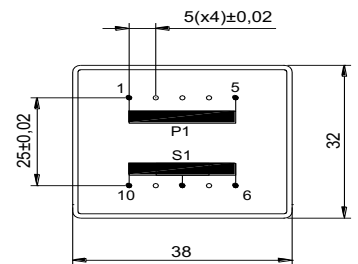

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085