



C3820 (EI 38)

6VA - Ta40°B

Dim:32x38x33,2mm




OPEN FRAME TRANSFORMERS

www.efiter.com


[home>>index](#)

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection

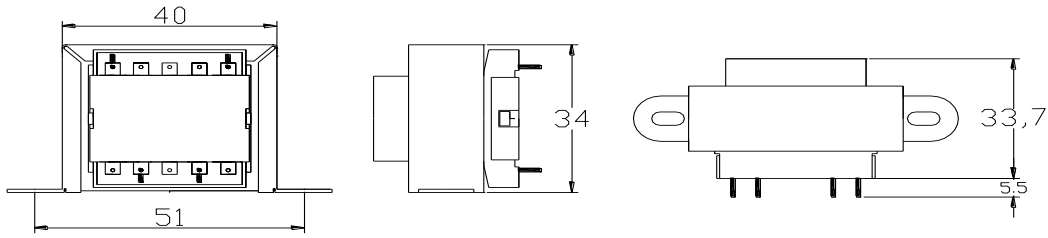


SINGLE SECONDARY, 6VA. Ta°40B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C3820014	C3820114	4,5V	1333mA	1400mA
C3820000	C3820100	6V	1000mA	1150mA
C3820002	C3820102	7,5V	800mA	1000mA
C3820004	C3820104	9V	667mA	700mA
C3820006	C3820106	12V	500mA	630mA
C3820008	C3820108	15V	400mA	500mA
C3820010	C3820110	18V	333mA	375mA
C3820020	C3820120	20V	300mA	350mA
C3820012	C3820112	24V	250mA	300mA

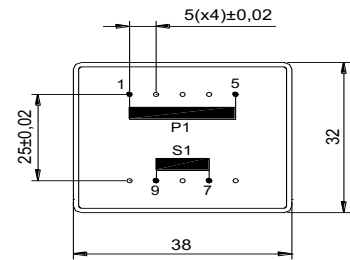


DUAL SECONDARY, 6VA. Ta°40B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C3820015	C3820115	2x4,5V	2x667mA	2x700mA
C3820001	C3820101	2x6V	2x500mA	2x550mA
C3820003	C3820103	2x7,5V	2x400mA	2x500mA
C3820005	C3820105	2x9V	2x333mA	2x200mA
C3820007	C3820107	2x12V	2x250mA	2x275mA
C3820009	C3820109	2x15V	2x200mA	2x250mA
C3820011	C3820111	2x18V	2x167mA	2x200mA
C3820019	C3820119	2x20V	2x150mA	2x175mA
C3820013	C3820113	2x24V	2x125mA	2x150mA

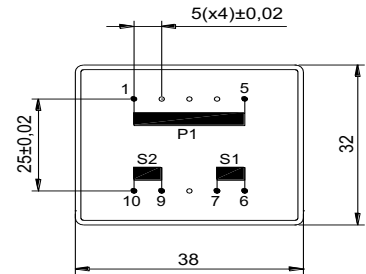

CENTER TAPPED, 6VA. Ta°40B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C3820035	C3820135	2x4,5V	2x667mA	2x700mA
C3820021	C3820121	2x6V	2x500mA	2x550mA
C3820023	C3820123	2x7,5V	2x400mA	2x500mA
C3820025	C3820125	2x9V	2x333mA	2x200mA
C3820027	C3820127	2x12V	2x250mA	2x275mA
C3820029	C3820129	2x15V	2x200mA	2x250mA
C3820031	C3820131	2x18V	2x167mA	2x200mA
C3820039	C3820139	2x20V	2x150mA	2x175mA
C3820033	C3820133	2x24V	2x125mA	2x150mA

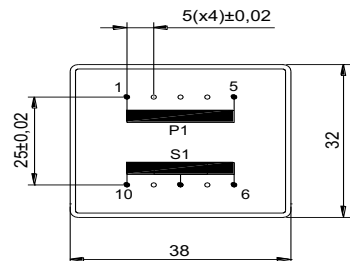

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085