



C9660 (EI 96)

200VA - Ta40°B

Dim:80x96x108mm




OPEN FRAME TRANSFORMERS

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection


www.efiter.com

[home>>index](#)

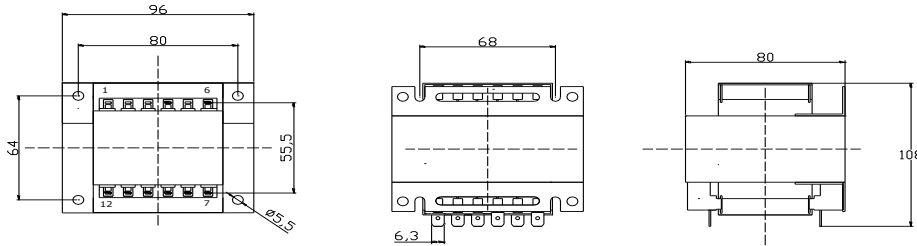


SINGLE SECONDARY, 200VA. Ta⁴⁰B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C9660014	C9660114	4,5V	44444mA	45000mA
C9660000	C9660100	6V	33333mA	35000mA
C9660002	C9660102	7,5V	26667mA	27000mA
C9660004	C9660104	9V	22222mA	23000mA
C9660006	C9660106	12V	16667mA	17000mA
C9660008	C9660108	15V	13333mA	15000mA
C9660010	C9660110	18V	11111mA	12000mA
C9660020	C9660120	20V	10000mA	12000mA
C9660012	C9660112	24V	8333mA	10000mA

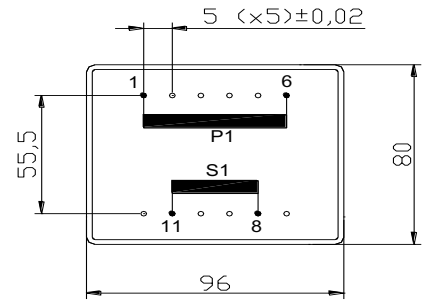


DUAL SECONDARY, 200VA. Ta⁴⁰B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C9660015	C9660115	2x4,5V	2x22222mA	2x23000mA
C9660001	C9660101	2x6V	2x16667mA	2x17000mA
C9660003	C9660103	2x7,5V	2x13333mA	2x15000mA
C9660005	C9660105	2x9V	2x11111mA	2x12000mA
C9660007	C9660107	2x12V	2x8333mA	2x9000mA
C9660009	C9660109	2x15V	2x6667mA	2x7000mA
C9660011	C9660111	2x18V	2x5556mA	2x6000mA
C9660019	C9660119	2x20V	2x5000mA	2x6000mA
C9660013	C9660113	2x24V	2x4167mA	2x5000mA

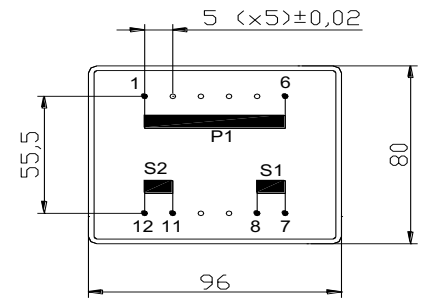

CENTER TAPPED, 200VA. Ta⁴⁰B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C9660035	C9660135	2x4,5V	2x22222mA	2x23000mA
C9660021	C9660121	2x6V	2x16667mA	2x17000mA
C9660023	C9660123	2x7,5V	2x13333mA	2x15000mA
C9660025	C9660125	2x9V	2x11111mA	2x12000mA
C9660027	C9660127	2x12V	2x8333mA	2x9000mA
C9660029	C9660129	2x15V	2x6667mA	2x7000mA
C9660031	C9660131	2x18V	2x5556mA	2x6000mA
C9660039	C9660139	2x20V	2x5000mA	2x6000mA
C9660033	C9660133	2x24V	2x4167mA	2x5000mA

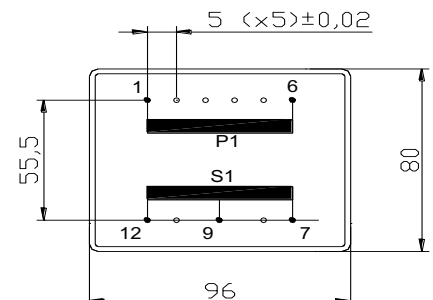

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085