




S3814 (EI 38)

3,0VA - Ta70°B

Dim:32x38x26,2mm



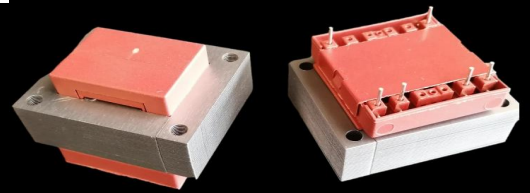


OPEN FRAME TRANSFORMERS

www.efiter.com


[home>>index](#)

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection

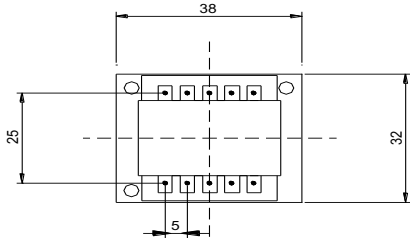


SINGLE SECONDARY, 3,0VA. Ta70°B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
S3814064	S3814164	4,5V	667mA	800mA
S3814050	S3814150	6V	500mA	630mA
S3814052	S3814152	7,5V	400mA	500mA
S3814054	S3814154	9V	333mA	400mA
S3814056	S3814156	12V	250mA	315mA
S3814058	S3814158	15V	200mA	250mA
S3814060	S3814160	18V	167mA	200mA
S3814070	S3814170	20V	150mA	200mA
S3814062	S3814172	24V	125mA	160mA

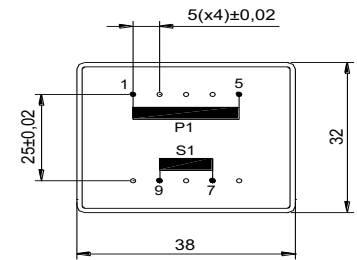


DUAL SECONDARY, 3,0VA. Ta70°B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
S3814065	S3814165	2x4,5V	2x333mA	2x400mA
S3814051	S3814151	2x6V	2x250mA	2x315mA
S3814053	S3814153	2x7,5V	2x200mA	2x250mA
S3814055	S3814155	2x9V	2x167mA	2x200mA
S3814057	S3814157	2x12V	2x125mA	2x160mA
S3814059	S3814159	2x15V	2x100mA	2x125mA
S3814061	S38141161	2x18V	2x83mA	2x100mA
S3814069	S3814169	2x20V	2x75mA	2x100mA
S3814063	S3814163	2x24V	2x63mA	2x80mA

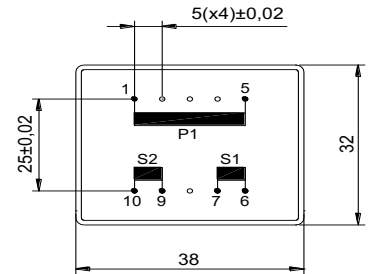

CENTER TAPPED, 3,0VA. Ta70°B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
S3814085	S3814185	2x4,5V	2x333mA	2x400mA
S3814071	S3814171	2x6V	2x250mA	2x315mA
S3814073	S3814173	2x7,5V	2x200mA	2x250mA
S3814075	S3814175	2x9V	2x167mA	2x200mA
S3814077	S3814177	2x12V	2x125mA	2x160mA
S3814079	S3814179	2x15V	2x100mA	2x125mA
S3814081	S3814181	2x18V	2x83mA	2x100mA
S3814089	S3814189	2x20V	2x75mA	2x100mA
S3814083	S3814183	2x24V	2x63mA	2x80mA

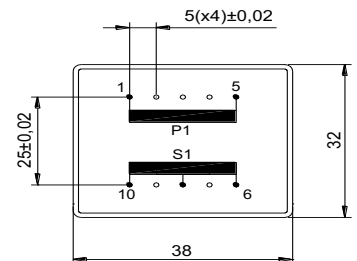

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085