




S3820 (EI 38)

6VA - Ta40°B

Dim:32x38x33,2mm



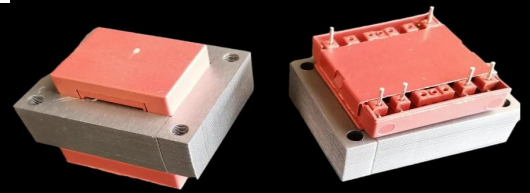


OPEN FRAME TRANSFORMERS

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection


www.efiter.com

[home>>index](#)

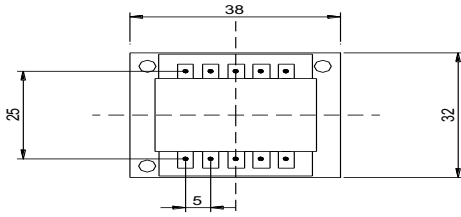


SINGLE SECONDARY, 6VA. Ia=40B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
S3820014	S3820114	4,5V	1333mA	1400mA
S3820000	S3820100	6V	1000mA	1150mA
S3820002	S3820102	7,5V	800mA	1000mA
S3820004	S3820104	9V	667mA	700mA
S3820006	S3820106	12V	500mA	630mA
S3820008	S3820108	15V	400mA	500mA
S3820010	S3820110	18V	333mA	375mA
S3820020	S3820120	20V	300mA	350mA
S3820012	S3820112	24V	250mA	300mA




DUAL SECONDARY, 6VA. Ta=40B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
S3820015	S3820115	2x4,5V	2x667mA	2x700mA
S3820001	S3820101	2x6V	2x500mA	2x550mA
S3820003	S3820103	2x7,5V	2x400mA	2x500mA
S3820005	S3820105	2x9V	2x333mA	2x200mA
S3820007	S3820107	2x12V	2x250mA	2x275mA
S3820009	S3820109	2x15V	2x200mA	2x250mA
S3820011	S3820111	2x18V	2x167mA	2x200mA
S3820019	S3820119	2x20V	2x150mA	2x175mA
S3820013	S3820113	2x24V	2x125mA	2x150mA

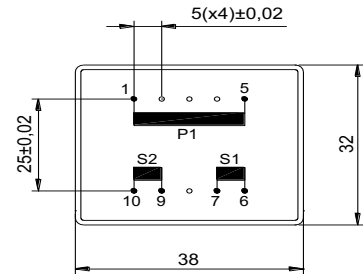

CENTER TAPPED, 6VA. Ta=40B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
S3820035	S3820135	2x4,5V	2x667mA	2x700mA
S3820021	S3820121	2x6V	2x500mA	2x550mA
S3820023	S3820123	2x7,5V	2x400mA	2x500mA
S3820025	S3820125	2x9V	2x333mA	2x200mA
S3820027	S3820127	2x12V	2x250mA	2x275mA
S3820029	S3820129	2x15V	2x200mA	2x250mA
S3820031	S3820131	2x18V	2x167mA	2x200mA
S3820039	S3820139	2x20V	2x150mA	2x175mA
S3820033	S3820133	2x24V	2x125mA	2x150mA



According EN61558, EN60590, EN60472, UL506, UL1585, UL5085