



# C6031 (EI 60)

35VA - Ta40°B

Dim:50x60x51,5mm




[www.efiter.com](http://www.efiter.com)

[home>>index](#)


## OPEN FRAME TRANSFORMERS

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection

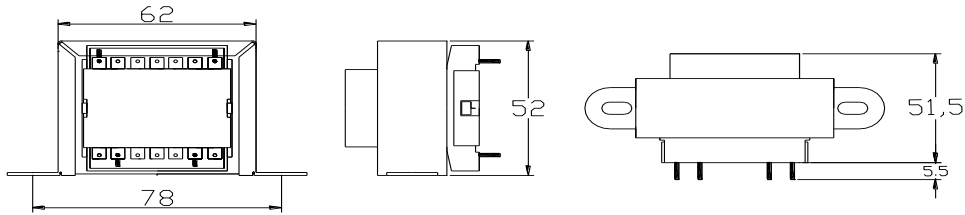


### SINGLE SECONDARY, 35VA. Ta°40B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C6031014	C6031114	4,5V	7778mA	8000mA
C6031000	C6031100	6V	5833mA	6000mA
C6031002	C6031102	7,5V	4667mA	5000mA
C6031004	C6031104	9V	3889mA	4000mA
C6031006	C6031106	12V	2917mA	3150mA
C6031008	C6031108	15V	2333mA	2500mA
C6031010	C6031110	18V	1944mA	2000mA
C6031020	C6031120	20V	1750mA	2000mA
C6031012	C6031112	24V	1458mA	1600mA

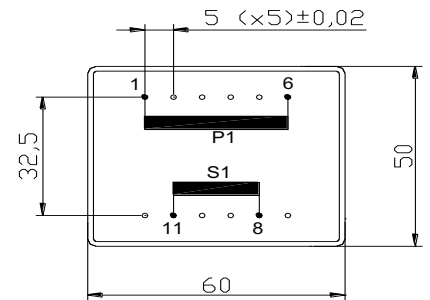


### DUAL SECONDARY, 35VA. Ta°40B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C6031015	C6031115	2x4,5V	2x3889mA	2x4000mA
C6031001	C6031101	2x6V	2x2917mA	2x3150mA
C6031003	C6031103	2x7,5V	2x2333mA	2x2500mA
C6031005	C6031105	2x9V	2x1944mA	2x2000mA
C6031007	C6031107	2x12V	2x1458mA	2x1600mA
C6031009	C6031109	2x15V	2x1167mA	2x1250mA
C6031011	C6031111	2x18V	2x972mA	2x1000mA
C6031019	C6031119	2x20V	2x875mA	2x1000mA
C6031013	C6031113	2x24V	2x729mA	2x800mA

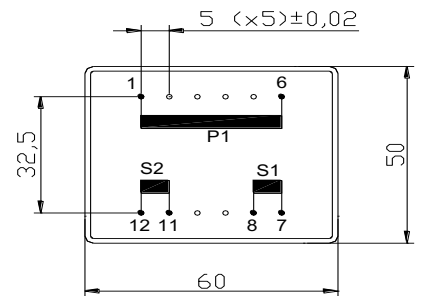

### CENTER TAPPED, 35VA. Ta°40B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C6031035	C6031135	2x4,5V	2x3889mA	2x4000mA
C6031021	C6031121	2x6V	2x2917mA	2x3150mA
C6031023	C6031123	2x7,5V	2x2333mA	2x2500mA
C6031025	C6031125	2x9V	2x1944mA	2x2000mA
C6031027	C6031127	2x12V	2x1458mA	2x1600mA
C6031029	C6031129	2x15V	2x1167mA	2x1250mA
C6031031	C6031131	2x18V	2x972mA	2x1000mA
C6031039	C6031139	2x20V	2x875mA	2x1000mA
C6031033	C6031133	2x24V	2x729mA	2x800mA

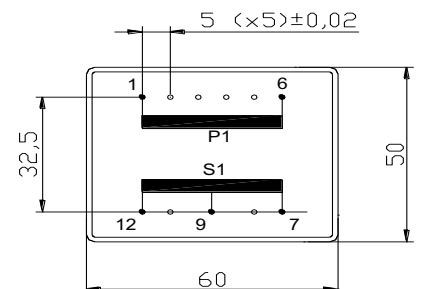

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085