



# C7540 (EI 75)

100VA - Ta70°B

Dim:62x75x84mm




[www.efiter.com](http://www.efiter.com)

[home>>index](#)


## OPEN FRAME TRANSFORMERS

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection

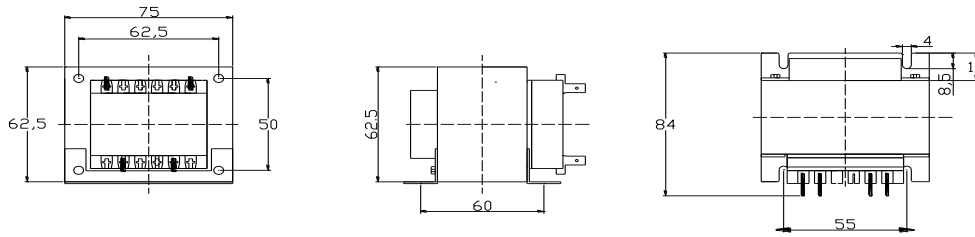


### SINGLE SECONDARY, 100VA. Ia≈70B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C7540064	C7540164	4,5V	22222mA	23000mA
C7540050	C7540150	6V	16667mA	17000mA
C7540052	C7540152	7,5V	13333mA	15000mA
C7540054	C7540154	9V	11111mA	12000mA
C7540056	C7540156	12V	8333mA	9000mA
C7540058	C7540158	15V	6667mA	7000mA
C7540060	C7540160	18V	5556mA	6000mA
C7540070	C7540170	20V	5000mA	6000mA
C7540062	C7540172	24V	4167mA	5000mA

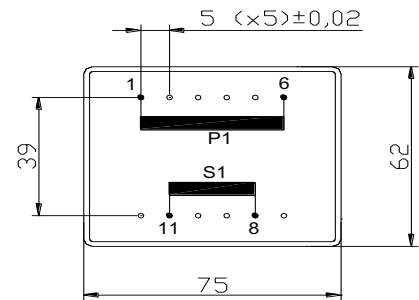


### DUAL SECONDARY, 100VA. Ta70B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C7540065	C7540165	2x4,5V	2x11111mA	2x12000mA
C7540051	C7540151	2x6V	2x8333mA	2x9000mA
C7540053	C7540153	2x7,5V	2x6667mA	2x7000mA
C7540055	C7540155	2x9V	2x5556mA	2x6000mA
C7540057	C7540157	2x12V	2x4167mA	2x5000mA
C7540059	C7540159	2x15V	2x3333mA	2x4000mA
C7540061	C7540161	2x18V	2x2778mA	2x3000mA
C7540069	C7540169	2x20V	2x2500mA	2x3000mA
C7540063	C7540163	2x24V	2x2083mA	2x2000mA

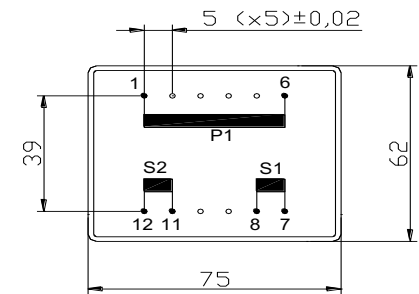

### CENTER TAPPED, 100VA. Ta70B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C7525085	C7540185	2x4,5V	2x11111mA	2x12000mA
C7540071	C7540171	2x6V	2x8333mA	2x9000mA
C7540073	C7540173	2x7,5V	2x6667mA	2x7000mA
C7540075	C7540175	2x9V	2x5556mA	2x6000mA
C7540077	C7540177	2x12V	2x4167mA	2x5000mA
C7540079	C7540179	2x15V	2x3333mA	2x4000mA
C7540081	C7540181	2x18V	2x2778mA	2x3000mA
C7540089	C7540189	2x20V	2x2500mA	2x3000mA
C7540083	C7540183	2x24V	2x2083mA	2x2000mA

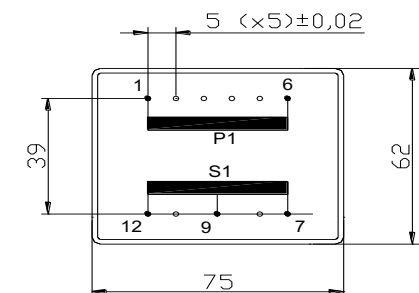

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085