



E3023 (EI 30/23)

3,2VA - Ta40°B

weight - 140gr.





www.efiter.com

[home>>index](#)


ENCAPSULATED TRANSFORMERS

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · Short circuit proof




SINGLE SECONDARY, 3,2VA. Ta⁴⁰B

HR REFERENCE		Vo/Vsec=1,7 Vo → Is=0 Vsec → Isec=In		Protection
Prim. 230V	Prim. 115V	Vsec	Isec	
E3023014	E3023114	4,5V	711mA	Short circuit proof
E3023000	E3023100	6V	533mA	
E3023002	E3023102	7,5V	426mA	
E3023004	E3023104	9V	355mA	
E3023006	E3023106	12V	266mA	
E3023008	E3023108	15V	213mA	
E3023010	E3023110	18V	177mA	
E3023012	E3023112	24V	133mA	

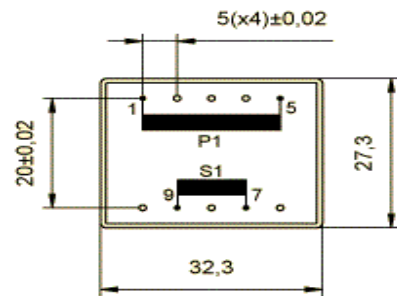


DUAL SECONDARY, 3,2VA. Ta⁴⁰B

HR REFERENCE		Vo/Vsec=1,7 Vo → Is=0 Vsec → Isec=In		Protection
Prim. 230V	Prim. 115V	Vsec	Isec	
E3023015	E3023115	2x4,5V	2x355mA	Short circuit proof
E3023001	E3023101	2x6V	2x266mA	
E3023003	E3023103	2x7,5V	2x213mA	
E3023005	E3023105	2x9V	2x177mA	
E3023007	E3023107	2x12V	2x133mA	
E3023009	E3023109	2x15V	2x106mA	
E3023011	E3023111	2x18V	2x88mA	
E3023013	E3023113	2x24V	2x66mA	

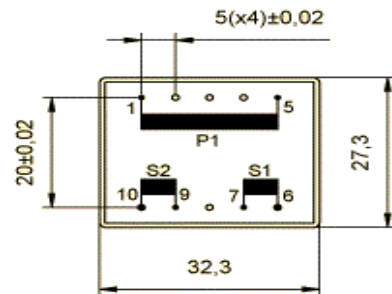

CENTER TAPPED, 3,2VA. Ta⁴⁰B

HR REFERENCE		Vo/Vsec=1,7 Vo → Is=0 Vsec → Isec=In		Protection
Prim. 230V	Prim. 115V	Vsec	Isec	
E3023035	E3023135	2x4,5V	2x355mA	Short circuit proof
E3023021	E3023121	2x6V	2x266mA	
E3023023	E3023123	2x7,5V	2x213mA	
E3023025	E3023125	2x9V	2x177mA	
E3023027	E3023127	2x12V	2x133mA	
E3023029	E3023129	2x15V	2x106mA	
E3023031	E3023131	2x18V	2x88mA	
E3023033	E3023133	2x24V	2x66mA	

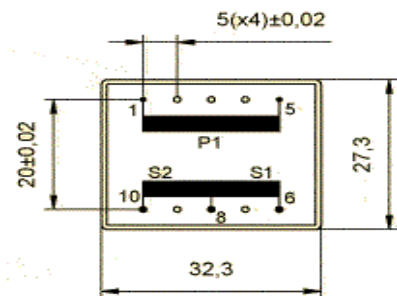

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 .