



E30/40/5,5

1,6VA - Ta70°B

weight - 420gr.




www.efiter.com

[home>>index](#)




FLAT ENCAPSULATED TRANSFORMERS

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · Short circuit proof

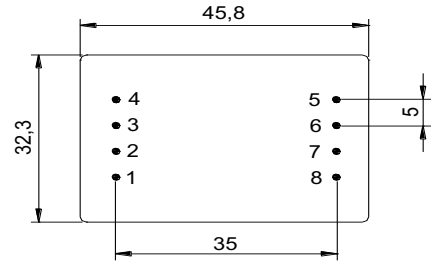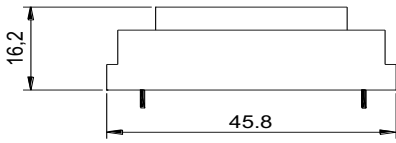

SINGLE SECONDARY, 1,6VA. Ta°70B

HR REFERENCE		Vo/Vsec=1,25 Vo-->Is=0 Vsec --> Isec=In		Protection
Prim. 230V	Prim. 115V	Vsec	Isec	
E3305064	E3305114	4,5V	355mA	Short circuit proof
E3305050	E3305150	6V	266mA	
E3305052	E3305152	7,5V	213mA	
E3305054	E3305154	9V	177mA	
E3305056	E3305156	12V	133mA	
E3305058	E3305158	15V	106mA	
E3305060	E3305160	18V	88mA	
E3305062	E3305162	24V	67mA	



DUAL SECONDARY, 1,6VA. Ta°70B

HR REFERENCE with fixing holes		Vo/Vsec=1,25 Vo-->Is=0 Vsec --> Isec=In		Protection
Prim. 230V	Prim. 115V	Vsec	Isec	
E3305065	E3305165	2x4,5V	2x177mA	Short circuit proof
E3305051	E3305151	2x6V	2x133mA	
E3305053	E3305153	2x7,5V	2x106mA	
E3305055	E3305155	2x9V	2x88mA	
E3305057	E3305157	2x12V	2x66mA	
E3305059	E3305159	2x15V	2x53mA	
E3305061	E3305161	2x18V	2x44mA	
E3305063	E3305163	2x24V	2x33mA	



According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 .