



# U3008 (UI 30/7,5)

4VA - Ta40°B

3,2VA - Ta70°B





www.efiter.com

weight - 160gr.

## ENCAPSULATED TRANSFORMERS


[home>>index](#)

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 - External protection

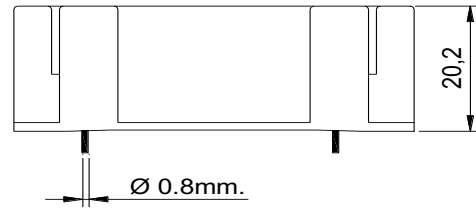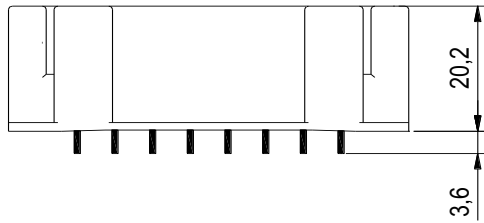


### 4VA. Ta40B

HR REFERENCE		Vo/Vsec=1,5 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 32mA/T 115V: 63mA/T
U30080xx	U30085xx	Vsec	Isec	Prot. Sec. mA/F
U3008007	U3008507	2x4,5V	2x444mA	2x500mA
U3008000	U3008500	2x6V	2x333mA	2x400mA
U3008001	U3008501	2x7,5V	2x266mA	2x315mA
U3008002	U3008502	2x9V	2x222mA	2x250mA
U3008003	U3008503	2x12V	2x166mA	2x200mA
U3008004	U3008504	2x15V	2x133mA	2x160mA
U3008005	U3008505	2x18V	2x111mA	2x125mA
U3008006	U3008506	2x24V	2x83mA	2x100mA

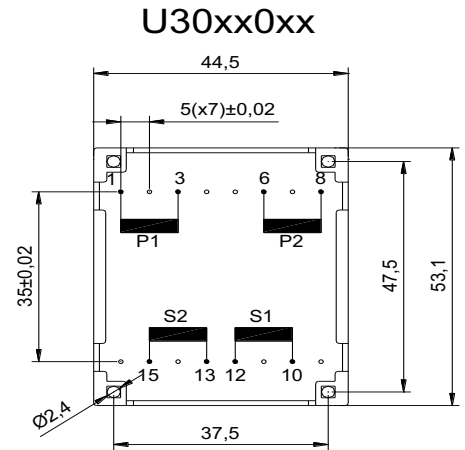



### 3,2VA. Ta70B

HR REFERENCE		Vo/Vsec=1,5 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 32mA/T 115V: 63mA/T
U30080xx	U30085xx	Vsec	Isec	Prot. Sec. mA/F
U3008057	U3008557	2x4,5V	2x355mA	2x400mA
U3008050	U3008550	2x6V	2x266mA	2x315mA
U3008051	U3008551	2x7,5V	2x213mA	2x250mA
U3008052	U3008552	2x9V	2x177mA	2x200mA
U3008053	U3008553	2x12V	2x133mA	2x160mA
U3008054	U3008554	2x15V	2x106mA	2x125mA
U3008055	U3008555	2x18V	2x88mA	2x100mA
U3008056	U3008556	2x24V	2x66mA	2x80mA


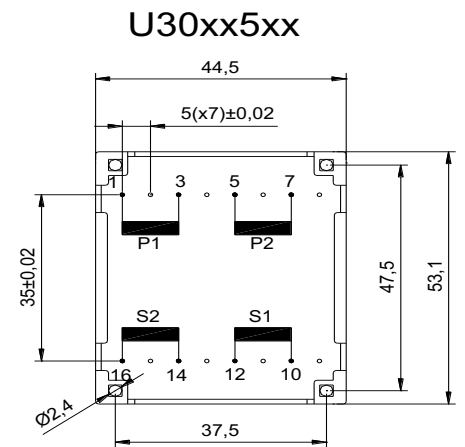


Primary connections

Secondary connections

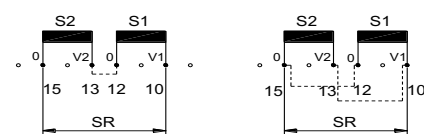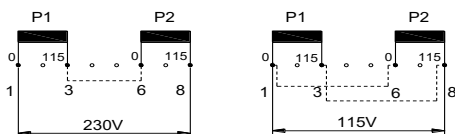

U30080xx

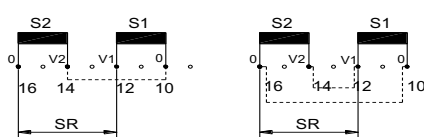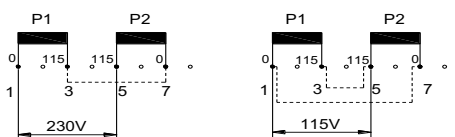

U30085xx

$$V_{sr} = V_1 + V_2$$

$$I_{sr} = I_1$$

$$V_{sr} = V_1$$

$$I_{sr} = I_1 + I_2$$

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085.