



E30/40/7,5

2,0VA - Ta70°B

weight - 420gr.




www.efiter.com

[home>>index](#)




FLAT ENCAPSULATED TRANSFORMERS

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · Short circuit proof

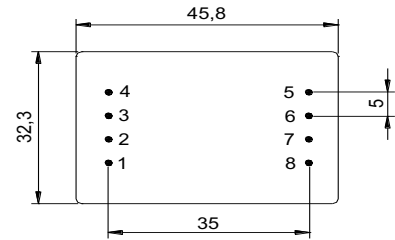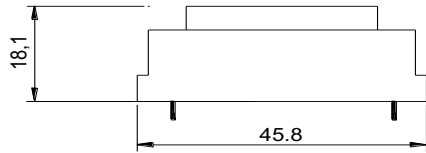

SINGLE SECONDARY, 2,0VA. Ta°70B

| HR REFERENCE | | Vo/Vsec=1,25 Vo-->Is=0 Vsec --> Isec=In | | Protection |
|--------------|------------|--|-------|---------------------|
| Prim. 230V | Prim. 115V | Vsec | Isec | |
| E3308064 | E3308114 | 4,5V | 444mA | Short circuit proof |
| E3308050 | E3308150 | 6V | 333mA | |
| E3308052 | E3308152 | 7,5V | 267mA | |
| E3308054 | E3308154 | 9V | 222mA | |
| E3308056 | E3308156 | 12V | 167mA | |
| E3308058 | E3308158 | 15V | 133mA | |
| E3308060 | E3308160 | 18V | 111mA | |
| E3308062 | E3308162 | 24V | 83mA | |



DUAL SECONDARY, 2,0VA. Ta°70B

| HR REFERENCE with fixing holes | | Vo/Vsec=1,25 Vo-->Is=0 Vsec --> Isec=In | | Protection |
|-----------------------------------|------------|--|---------|---------------------|
| Prim. 230V | Prim. 115V | Vsec | Isec | |
| E3308065 | E3308165 | 2x4,5V | 2x222mA | Short circuit proof |
| E3308051 | E3308151 | 2x6V | 2x167mA | |
| E3308053 | E3308153 | 2x7,5V | 2x133mA | |
| E3308055 | E3308155 | 2x9V | 2x111mA | |
| E3308057 | E3308157 | 2x12V | 2x83mA | |
| E3308059 | E3308159 | 2x15V | 2x67mA | |
| E3308061 | E3308161 | 2x18V | 2x56mA | |
| E3308063 | E3308163 | 2x24V | 2x42mA | |



According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 .