



E30/40/10,5

2,4VA - Ta70°B

weight - 420gr.




www.efiter.com

[home>>index](#)



FLAT ENCAPSULATED TRANSFORMERS

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · Short circuit proof

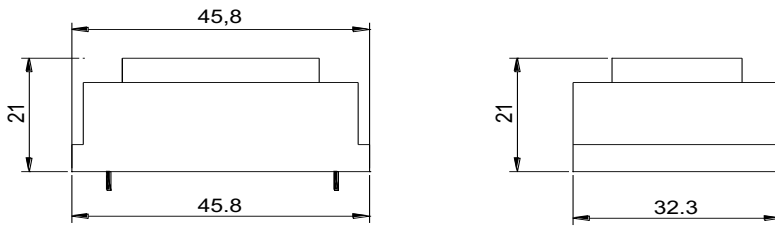

SINGLE SECONDARY, 2,4VA. Ta°70B

HR REFERENCE		Vo/Vsec=1,25 Vo-->Is=0 Vsec --> Isec=In		Protection
Prim. 230V	Prim. 115V	Vsec	Isec	
E3310064	E3310114	4,5V	533mA	Short circuit proof
E3310050	E3310150	6V	400mA	
E3310052	E3310152	7,5V	320mA	
E3310054	E3310154	9V	267mA	
E3310056	E3310156	12V	200mA	
E3310058	E3310158	15V	160mA	
E3310060	E3310160	18V	133mA	
E3310062	E3310162	24V	100mA	

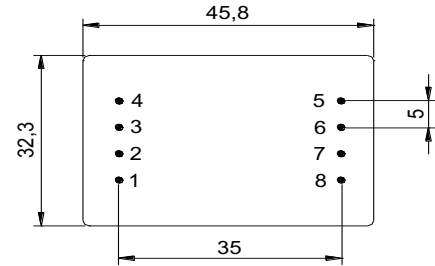

DUAL SECONDARY, 2,4VA. Ta°70B

HR REFERENCE with fixing holes		Vo/Vsec=1,25 Vo-->Is=0 Vsec --> Isec=In		Protection
Prim. 230V	Prim. 115V	Vsec	Isec	
E3310065	E3310165	2x4,5V	2x267mA	Short circuit proof
E3310051	E3310151	2x6V	2x200mA	
E3310053	E3310153	2x7,5V	2x160mA	
E3310055	E3310155	2x9V	2x160mA	
E3310057	E3310157	2x12V	2x100mA	
E3310059	E3310159	2x15V	2x80mA	
E3310061	E3310161	2x18V	2x67mA	
E3310063	E3310163	2x24V	2x50mA	



According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 .