




"SV" TRANSFORMER

SV EI38 to EI66




www.efiter.com



[home>>index](#)

ENCAPSULATED TRANSFORMERS

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · Short circuit proof

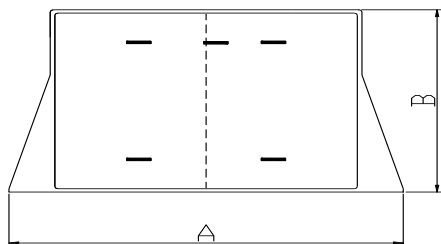

UNITATS: mm.
TOLERÀNCIA GENERAL
ISO 2768 - c

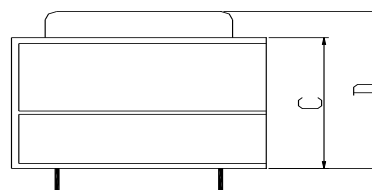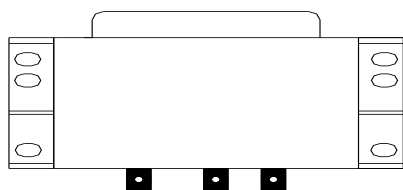

SV transformers

DIM(mm)	A	B	C	D	POWER
E3814 40°C	61	34,8	27,7	33	4,0VA 70°C/B
E3814 70°C	61	34,8	27,7	33	3,5VA 70°C/B
E4215/40°C	65	38	30,2	33	6VA 40°C/B
E4215/70°C	65	38	30,2	33	5VA 70°C/B
E4817/40°C	75	43	33,2	38,6	6VA 40°C/B
E4817/70°C	75	43	33,2	38,6	5VA 70°C/B
E4821/40°C	75	43	32,4	39,3	6VA 40°C/B
E4821/70°C	75	43	32,4	39,3	5VA 70°C/B
E5419/40°C	82,5	48,5	38,1	42,8	6VA 40°C/B
E5419/70°C	82,5	48,5	38,1	42,8	5VA 70°C/B
E6021/40°C	88	53,5	38,1	48	25VA 40°C/B
E6021/70°C	88	53,5	38,1	48	20VA 70°C/B
E6026/40°C	88	53,5	42,2	52,2	30VA 40°C/B
E6026/70°C	88	53,5	42,2	52,2	24VA 70°C/B
E6031/40°C	88	53,5	47,1	57,2	35VA 40°C/B
E6031/70°C	88	53,5	47,1	57,2	30VA 70°C/B
E6623/40°C	94	58,5	40,3	49,6	35VA 40°C/B
E6623/70°C	94	58,5	40,3	49,6	30VA 70°C/B
E6630/40°C	94	58,5	47,1	56,5	35VA 40°C/B
E6630/70°C	94	58,5	47,1	56,5	30VA 70°C/B
E6635/40°C	94	58,5	51,3	61,2	35VA 40°C/B
E6635/70°C	94	58,5	51,3	61,2	30VA 70°C/B

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 .