



E6026 (EI 60/25,5)

24VA - Ta40°B

weight - 675gr.




www.eifter.com

[home>>index](#)


ENCAPSULATED TRANSFORMERS

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection

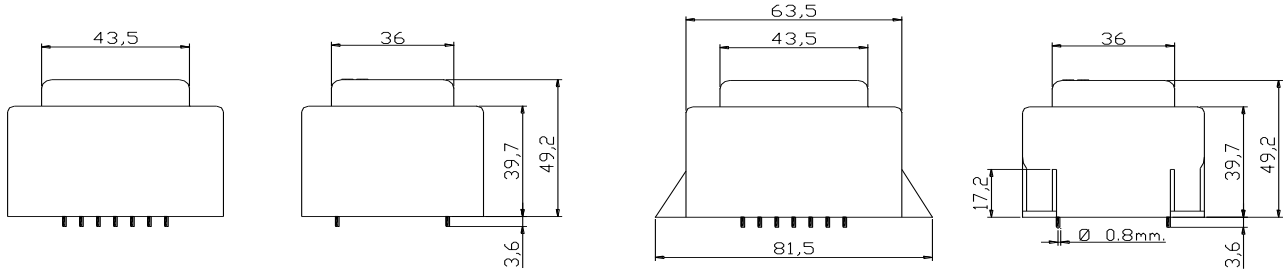


SINGLE SECONDARY, 24VA. Ta°70B

| HR REFERENCE | | HR REFERENCE with fixing holes | | Vo/Vsec=1,2 Vo-->Is=0 Vsec --> Isec=In | | Prot. Prim. 230V: 200mA/T 115V: 400mA/T |
|--------------|------------|--------------------------------|------------|---|--------|---|
| Prim. 230V | Prim. 115V | Prim. 230V | Prim. 115V | Vsec | Isec | Prot. Sec. mA/F |
| E6026064 | E6026164 | E6026564 | E6026664 | 4,5V | 5333mA | 6000mA |
| E6026050 | E6026150 | E6026550 | E6026650 | 6V | 4000mA | 5000mA |
| E6026052 | E6026152 | E6026552 | E6026652 | 7,5V | 3200mA | 4000mA |
| E6026054 | E6026154 | E6026554 | E6026654 | 9V | 2666mA | 3150mA |
| E6026056 | E6026156 | E6026556 | E6026656 | 12V | 2000mA | 2500mA |
| E6026058 | E6026158 | E6026558 | E6026658 | 15V | 1600mA | 2000mA |
| E6026060 | E6026160 | E6026560 | E6026660 | 18V | 1333mA | 1600mA |
| E6026062 | E6026162 | E6026562 | E6026662 | 24V | 1000mA | 1250mA |

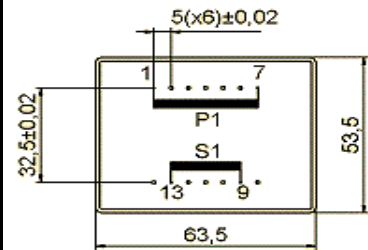


DUAL SECONDARY, 24VA. Ta°70B

| HR REFERENCE | | HR REFERENCE with fixing holes | | Vo/Vsec=1,2 Vo-->Is=0 Vsec --> Isec=In | | Prot. Prim. 230V: 200mA/T 115V: 400mA/T |
|--------------|------------|--------------------------------|------------|---|----------|---|
| Prim. 230V | Prim. 115V | Prim. 230V | Prim. 115V | Vsec | Isec | Prot. Sec. mA/F |
| E6026065 | E6026165 | E6026565 | E6026665 | 2x4,5V | 2x2666mA | 2x3150mA |
| E6026051 | E6026151 | E6026551 | E6026651 | 2x6V | 2x2000mA | 2x2500mA |
| E6026053 | E6026153 | E6026553 | E6026653 | 2x7,5V | 2x1600mA | 2x2000mA |
| E6026055 | E6026155 | E6026555 | E6026655 | 2x9V | 2x1333mA | 2x1600mA |
| E6026057 | E6026157 | E6026557 | E6026657 | 2x12V | 2x1000mA | 2x1250mA |
| E6026059 | E6026159 | E6026559 | E6026659 | 2x15V | 2x800mA | 2x1000mA |
| E6026061 | E6026161 | E6026561 | E6026661 | 2x18V | 2x666mA | 2x800mA |
| E6026063 | E6026163 | E6026563 | E6026663 | 2x24V | 2x500mA | 2x630mA |

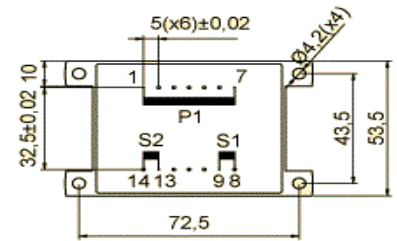

CENTER TAPPED, 24VA. Ta°70B

| HR REFERENCE | | HR REFERENCE with fixing holes | | Vo/Vsec=1,2 Vo-->Is=0 Vsec --> Isec=In | | Prot. Prim. 230V: 200mA/T 115V: 400mA/T |
|--------------|------------|--------------------------------|------------|---|----------|---|
| Prim. 230V | Prim. 115V | Prim. 230V | Prim. 115V | Vsec | Isec | Prot. Sec. mA/F |
| E6026085 | E6026185 | E6026585 | E6026685 | 2x4,5V | 2x2666mA | 2x3150mA |
| E6026071 | E6026171 | E6026571 | E6026671 | 2x6V | 2x2000mA | 2x2500mA |
| E6026073 | E6026173 | E6026573 | E6026673 | 2x7,5V | 2x1600mA | 2x2000mA |
| E6026075 | E6026175 | E6026575 | E6026675 | 2x9V | 2x1333mA | 2x1600mA |
| E6026077 | E6026177 | E6026577 | E6026677 | 2x12V | 2x1000mA | 2x1250mA |
| E6026079 | E6026179 | E6026579 | E6026679 | 2x15V | 2x800mA | 2x1000mA |
| E6026081 | E6026181 | E6026581 | E6026681 | 2x18V | 2x666mA | 2x800mA |
| E6026083 | E6026183 | E6026583 | E6026683 | 2x24V | 2x500mA | 2x630mA |

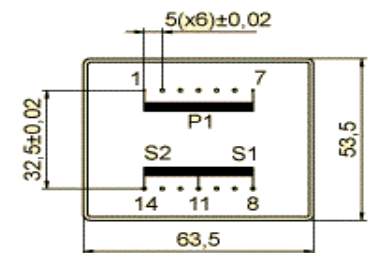

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 .