




HIGH FREQUENCY TRANSFORMERS EFD Series



www.eifter.com

[home>>index](#)

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection

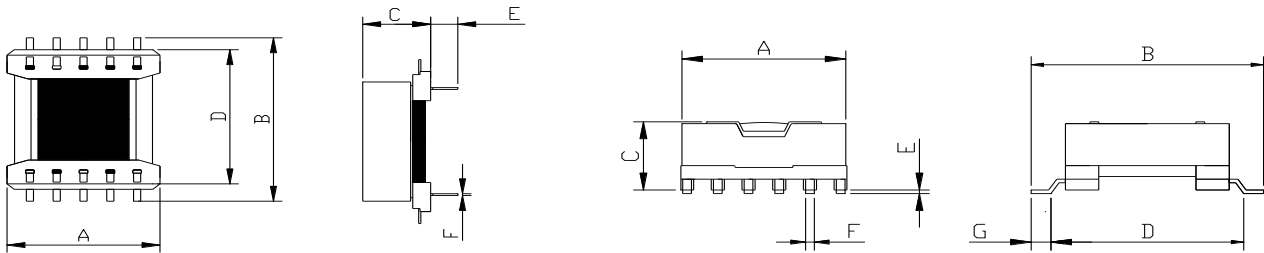

SMD

MECHANICAL AND ELECTRICAL PARAMETERS

HORIZONTAL	A	B	C	D	E	F	MAX POWER
EFD15	15,2	16,7	8	13,75	3,6	0,6	1,7W
EFD20	20,2	21,2	10	17,5	3,6	0,6	1,8W
EFD25	25,2	26,2	12,55	22,5	3,6	0,8	1,75W
EFD30	29,2	31,2	12,55	27,5	3,6	0,8	3,0W

SMD	A	B	C	D	E	F	MAX POWER
EFD15	15,1	21,6	7,35	17	0,4	0,8	1,7W
EFD20	21,5	24,6	10	21	0,3	0,7	1,8W
EFD25	25	31,5	12,5	28	0,9	0,8	1,75W
EFD30	29,2	31,2	12,55	27,5	3,6	0,8	3,0w

- All measures are in mm.
- Customized Request

FEATURES

- Operating Frequency: 50 to 200KHz
- Power range: 65W
- Magnetic flux leakage small, high power density, suitable for flags desing.
- Operating temperature: -40°C to +105°C
- All parts meet ROHS compliance
- Construction according to regulation IEC EN60950, EN 61558
- Creepage distance according to regulation IEC EN60950, EN 61558, EN 60335
- Non standard transformers on request