




COMMON MODE POWER LINE CHOKE

HR1920 SERIES



www.efiter.com

[home>>index](#)

According DIN EN 60938-2(VDE 0565-2-1):2008-02; EN 60938-2:1999+A1:2007

FEATURES

Rated voltage 250VAC

Rated current 1,5A a 20A

Rated inductance 0,68mH to 33mH

Turns ratio:N1:N2=1:1(+/- 2%)

Hi-Pot_Pri_Sec 1500vac/5mA/2sec


Operating temperature: -40°C to +105°C

All parts meet ROHS compliance

ELECTRICAL CHARACTERISTICS

PART Number	Inductance (mH)	DC Resistance (Ω)typ	Rated current (A)
HR 1920 000	33	0.40	1.5
HR 1920 001	22	0.25	2.0
HR 1920 002	10	0.15	2.5
HR 1920 003	6.8	0.10	3.0
HR 1920 004	3.9	0.04	4.0
HR 1920 005	3.3	0.03	4.0
HR 1920 006	2.2	0.02	9.0
HR 1920 007	1.0	0.01	15.0
HR 1920 008	0.68	0.006	20.0

TECHNICAL INFORMATION

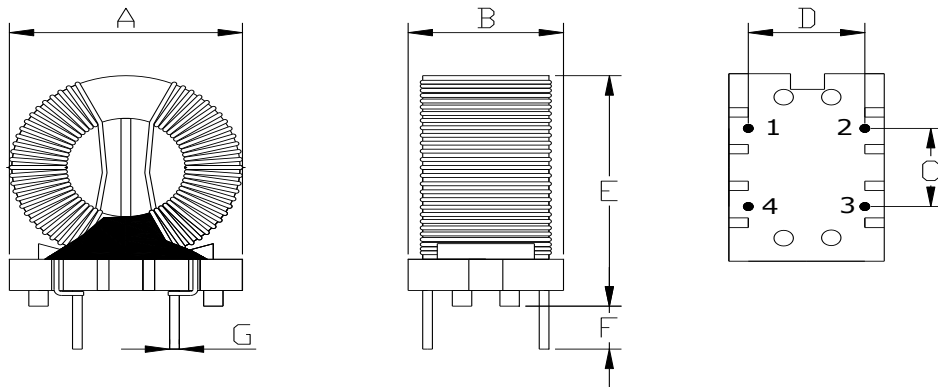

Part number	A	B	C	D	E	F	G
HR 1920	30.5	18.5	15.0	15.0	32.0	5.0	1.0