




# HIGH FREQUENCY TRANSFORMERS PQ Series



[www.efiter.com](http://www.efiter.com)

[home>>index](#)

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection

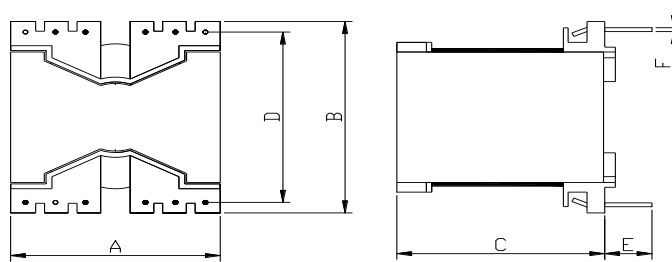

## MECHANICAL AND ELECTRICAL PARAMETERS

HORIZONTAL	A	B	C	D	E	F	MAX POWER
PQ20/16	23,15	23,15	17,9	20,3	7,35	0,6	72VA
PQ20/20	23,15	23,15	22	20,3	7,35	0,6	82VA
PQ26/20	26,5	29,75	21,5	25,4	7,2	0,65	92VA
PQ26/25	26,5	29,75	26,05	25,4	7,2	0,65	172VA
PQ32/20	32,15	34,3	22,35	30,5	7,2	0,75	215VA
PQ32/25	32,15	34,3	27,2	30,5	7,2	0,75	232VA
PQ32/30	32,15	34,3	32,15	30,5	7,2	0,75	280VA
PQ35/35	35,5	39,1	37,6	35,5	5,3	1	452VA
PQ40/40	40	42	45	38,1	3,6	1	596VA
PQ50/50	51	51,6	51	45,72	7,6	1,2	1045VA

- All measures are in mm.
- Customized Request

## FEATURES

- Operating Frequency: 50 to 200KHz
- Power range:
- Magnetic flux leakage small, high power density, suitable for flags desing.
- Operating temperature: -40°C to +105°C
- All parts meet ROHS compliance
- Construction according to regulation IEC EN60950, EN 61558
- Creepage distance according to regulation IEC EN60950, EN 61558, EN 60335
- Non standard transformers on request