



TOROIDAL TRANSFORMERS

T002-20VA 40°C/B



www.efiter.com

[home>>index](#)

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection

TECHNICAL SPECIFICATIONS


- Power 20VA 40°C/B
- Configuration of primary/secondary single, dual or multiple allow get any required
- The toroidal transformers have a lot more advantages than the conventional and encapsulated ones
- Their use is highly recommended due to their improvements in radiation,
- Designed and manufactured according regulations EN61558-1
- Double isolation copper wire
- Ambient temperature of 40°C/104°F
- Magnetic core of grain-oriented silicon steel
- Superior isolation at 5M at 500 Vdc
- Primary Dielectric strength / superior secondary at 3 KV , 1min.
- The wide range of HR toroidal transformers goes from 8VA to 20KVA. •
- Winding identification for colour references

ELECTRICAL CHARACTERISTICS

POWER	Series	PRIMARY 230V 50/60Hz												Wheight (kg)
		SINGLE SECONDARY (--) V.												
		6V	10V	12V	15V	18V	22V	24V	30V	35V	40V	60V	80V	
20VA	REF	T 002 106	T 002 110	T 002 112	T 002 115	T 002 118	T 002 122	T 002 124	T 002 130	T 002 135	T 002 140	T 002 160	T 002 180	0.37
	Is-A	3.33	2.0	1.66	1.33	1.11	0.9	0.83	0.66	0.57	0.5	0.33	0.25	

POWER	Series	PRIMARY 230V 50/60Hz								Wheight (kg)
		DUAL SECONDARY 2 X(--) V.								
		2x6V	2x10V	2x12V	2x15V	2x18V	2x22V	2x24V	2x30V	
20VA	REF	T 002 206	T 002 210	T 002 212	T 002 215	T 002 218	T 002 222	T 002 224	T 002 230	0.53
	Is-A	2x1,67	2x1,67	2x1,67	2x1,67	2x1,67	2x1,67	2x1,67	2x1,67	

MECHANICAL INFORMATION

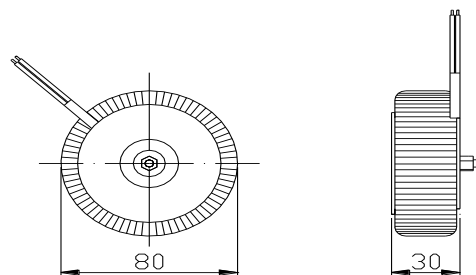

dim are mm