



TOROIDAL TRANSFORMERS

T004-40VA 40°C/B



www.efiter.com

[home>>index](#)

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection

TECHNICAL SPECIFICATIONS


- Power 40VA 40°C/B
- Configuration of primary/secondary single, dual or multiple allow get any required
- The toroidal transformers have a lot more advantages than the conventional and encapsulated ones
- Their use is highly recommended due to their improvements in radiation,
- Designed and manufactured according regulations EN61558-1
- Double isolation copper wire
- Ambient temperature of 40°C/104°F
- Magnetic core of grain-oriented silicon steel
- Superior isolation at 5M at 500 Vdc
- Primary Dielectric strength / superior secondary at 3 KV , 1min.
- The wide range of HR toroidal transformers goes from 8VA to 20KVA.
- Winding identification for colour references

ELECTRICAL CHARACTERISTICS

POWER	Series	PRIMARY 230V 50/60Hz												Wheight (kg)
		SINGLE SECONDARY (--) V.												
		6V	10V	12V	15V	18V	22V	24V	30V	35V	40V	60V	80V	
30VA	REF	T 004 106	T 004 110	T 004 112	T 004 115	T 004 118	T 004 122	T 004 124	T 004 130	T 004 135	T 004 140	T 004 160	T 004 180	0.56
	Is-A	6.66	4.0	3.33	2.66	2.22	1.88	1.66	1.33	1.14	1.0	0.66	0.5	

POWER	Series	PRIMARY 230V 50/60Hz								Wheight (kg)
		DUAL SECONDARY 2 X(--) V.								
		2x6V	2x10V	2x12V	2x15V	2x18V	2x22V	2x24V	2x30V	
30VA	REF	T 004 206	T 004 210	T 004 212	T 004 215	T 004 218	T 004 222	T 004 224	T 004 230	0.56
	Is-A	2x3.33	2x2.0	2x1.67	2x1.33	2x1.11	2x0.91	2x0.83	2x0.67	

MECHANICAL INFORMATION

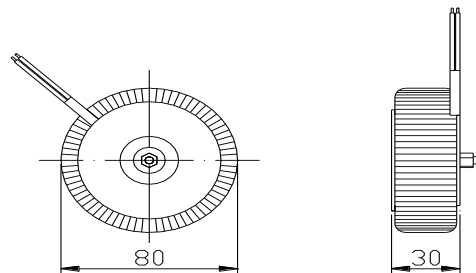

dim are mm