



TOROIDAL TRANSFORMERS

T006-60VA 40°C/B



www.efiter.com

[home>>index](#)

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection

TECHNICAL SPECIFICATIONS


- Power 60VA 40°C/B
- Configuration of primary/secondary single, dual or multiple allow get any required
- The toroidal transformers have a lot more advantages than the conventional and encapsulated ones
- Their use is highly recommended due to their improvements in radiation,
- Designed and manufactured according regulations EN61558-1
- Double isolation copper wire
- Ambient temperature of 40°C/104°F
- Magnetic core of grain-oriented silicon steel
- Superior isolation at 5M at 500 Vdc
- Primary Dielectric strength / superior secondary at 3 KV , 1min.
- The wide range of HR toroidal transformers goes from 8VA to 20KVA. •
- Winding identification for colour references

ELECTRICAL CHARACTERISTICS

POWER	Series	PRIMARY 230V 50/60Hz												Wheight
		SINGLE SECONDARY (--) V.												(kg)
		6V	10V	12V	15V	18V	22V	24V	30V	35V	40V	60V	80V	
60VA	REF	T 006 106	T 006 110	T 006 112	T 006 115	T 006 118	T 006 122	T 006 124	T 006 130	T 006 135	T 006 140	T 006 160	T 006 180	0.75
	Is-A	10.0	6.0	5.0	4.0	3.33	2.72	2.5	2.0	1.71	1.5	1.0	0.75	

POWER	Series	PRIMARY 230V 50/60Hz									Wheight
		DUAL SECONDARY 2 X(--) V.									(kg)
		2x6V	2x10V	2x12V	2x15V	2x18V	2x22V	2x24V	2x30V	2x35V	
60VA	REF	T 006 206	T 006 210	T 006 212	T 006 215	T 006 218	T 006 222	T 006 224	T 006 230	T 006 230	0.75
	Is-A	2x5.0	2x3.0	2x2.5	2x2.2	2x1.67	2x1.36	1.25	2x1	2x0.86	

MECHANICAL INFORMATION

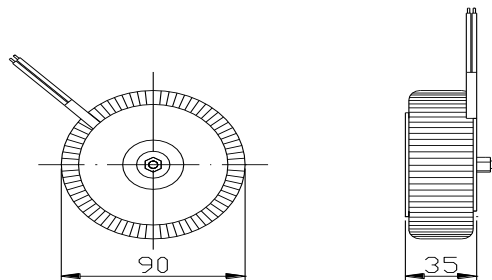

dim are mm