



TOROIDAL TRANSFORMERS

T008-80VA 40°C/B



www.efiter.com

[home>>index](#)

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection

TECHNICAL SPECIFICATIONS


- Power 80VA 40°C/B
- Configuration of primary/secondary single, dual or multiple allow get any required
- The toroidal transformers have a lot more advantages than the conventional and encapsulated ones
- Their use is highly recommended due to their improvements in radiation,
- Designed and manufactured according regulations EN61558-1
- Double isolation copper wire
- Ambient temperature of 40°C/104°F
- Magnetic core of grain-oriented silicon steel
- Superior isolation at 5M at 500 Vdc
- Primary Dielectric strength / superior secondary at 3 KV , 1min.
- The wide range of HR toroidal transformers goes from 8VA to 20KVA.
- Winding identification for colour references

ELECTRICAL CHARACTERISTICS

POWER	Series	PRIMARY 230V 50/60Hz												Wheight (kg)
		SINGLE SECONDARY (--) V.												
		6V	10V	12V	15V	18V	22V	24V	30V	35V	40V	60V	80V	
80VA	REF	T 008 106	T 008 110	T 008 112	T 008 115	T 008 118	T 008 122	T 008 124	T 008 130	T 008 135	T 008 140	T 008 160	T 008 180	0.98
	Is-A	13.3	8.0	6.66	5.33	4.44	3.63	3.33	2.66	2.28	2.0	1.33	1.0	

POWER	Series	PRIMARY 230V 50/60Hz										Wheight (kg)
		DUAL SECONDARY 2 X(--) V.										
		2x6V	2x10V	2x12V	2x15V	2X18V	2X22V	2X24V	2X30V	2X35V	2X40V	
80VA	REF	T 008 206	T 008 210	T 008 212	T 008 215	T 008 218	T 008 222	T 008 224	T 008 230	T 008 235	T 008 240	0.98
	Is-A	2x6.66	2x4.0	2x3.33	2x2.67	2x2.2	2x1.8	2x1.66	2x1.33	2x1.14	2x1.0	

MECHANICAL INFORMATION

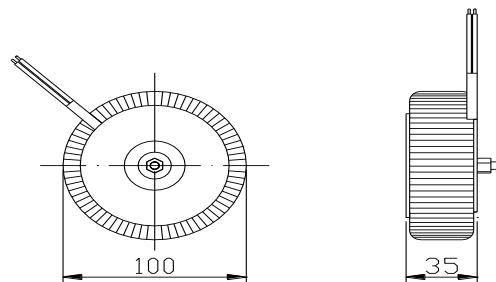

dim are mm