



TOROIDAL TRANSFORMERS

T016 160VA 40°C/B



www.efiter.com

[home>>index](#)

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection

TECHNICAL SPECIFICATIONS


- Power 160VA 40°C/B
- Configuration of primary/secondary single, dual or multiple allow get any required
- The toroidal transformers have a lot more advantages than the conventional and encapsulated ones
- Their use is highly recommended due to their improvements in radiation,
- Designed and manufactured according regulations EN61558-1
- Double isolation copper wire
- Ambient temperature of 40°C/104°F
- Magnetic core of grain-oriented silicon steel
- Superior isolation at 5M at 500 Vdc
- Primary Dielectric strength / superior secondary at 3 KV , 1min.
- The wide range of HR toroidal transformers goes from 8VA to 20KVA. •
- Winding identification for colour references

ELECTRICAL CHARACTERISTICS

POWER	Series	PRIMARY 230V 50/60Hz											
		SINGLE SECONDARY (--) V.											
						18V	22V	24V	30V	35V	40V	60V	80V
160VA	REF					T 016 118	T 016 122	T 016 124	T 016 130	T 016 135	T 016 140	T 016 160	T 016 180
	Is-A					8.88	7.27	6.66	5.33	4.57	4.0	2.66	2.0

POWER	Series	PRIMARY 230V 50/60Hz									Wheight (kg)
		DUAL SECONDARY 2 X(--) V.									
			2x10V	2x12V	2x15V	2x18V	2x22V	2x24V	2x30V	2x40V	
160VA	REF		T 016 210	T 016 212	T 016 215	T 016 218	T 016 222	T 016 224	T 016 230	T 016 240	1.68
	Is-A		2x8.0	2x26.67	2x5.33	2x4.44	2x3.33	2x2.67	2x2.3	2x2.2	

MECHANICAL INFORMATION

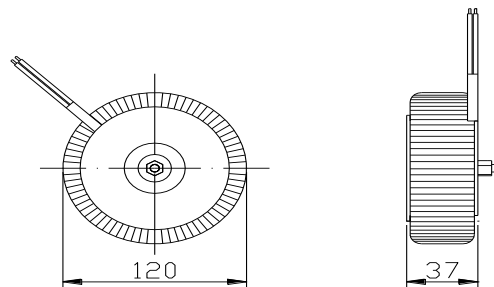

dim are mm