



# TOROIDAL TRANSFORMERS

## T020 200VA 40°C/B



[www.efiter.com](http://www.efiter.com)

[home>>index](#)

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection

### TECHNICAL SPECIFICATIONS


- Power 200VA 40°C/B
- Configuration of primary/secondary single, dual or multiple allow get any required
- The toroidal transformers have a lot more advantages than the conventional and encapsulated ones
- Their use is highly recommended due to their improvements in radiation,
- Designed and manufactured according regulations EN61558-1
- Double isolation copper wire
- Ambient temperature of 40°C/104°F
- Magnetic core of grain-oriented silicon steel
- Superior isolation at 5M at 500 Vdc
- Primary Dielectric strength / superior secondary at 3 KV , 1min.
- The wide range of HR toroidal transformers goes from 8VA to 20KVA.
- Winding identification for colour references

### ELECTRICAL CHARACTERISTICS

POWER	Series	PRIMARY 230V 50/60Hz												Wheight (kg)
		SINGLE SECONDARY (--) V.												
						18V	22V	24V	30V	35V	40V	60V	80V	
200VA	REF					T 020 118	T 020 122	T 020 124	T 020 130	T 020 135	T 020 140	T 020 160	T 020 180	2.15
	Is-A					11.1	9.09	8.33	6.06	5.71	5	23.33	2.5	

POWER	Series	PRIMARY 230V 50/60Hz									Wheight (kg)
		DUAL SECONDARY 2 X(--) V.									
			2x10V	2x12V	2x15V	2x18V	2x22V	2x24V	2x30V	2x35V	
200VA	REF		T 020 210	T 020 212	T 020 215	T 020 218	T 020 222	T 020 224	T 020 230	T 020 230	2.15
	Is-A		2x10.0	2x8.33	2x6.67	2x5.56	2x4.55	2x3.33	2x2.86	2x2.5	

### MECHANICAL INFORMATION

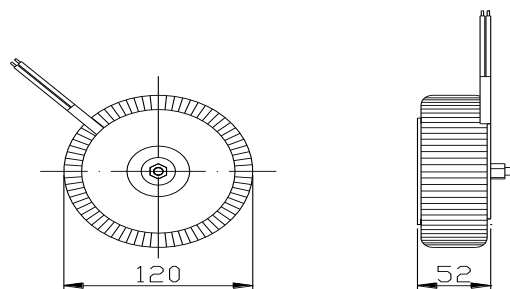

dim are mm