



TOROIDAL TRANSFORMERS

T025 250VA 40°C/B



www.efiter.com

[home>>index](#)

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 - External protection

TECHNICAL SPECIFICATIONS


- Power 250VA 40°C/B
- Configuration of primary/secondary single, dual or multiple allow get any required
- The toroidal transformers have a lot more advantages than the conventional and encapsulated ones
- Their use is highly recommended due to their improvements in radiation,
- Designed and manufactured according regulations EN61558-1
- Double isolation copper wire
- Ambient temperature of 40°C/104°F
- Magnetic core of grain-oriented silicon steel
- Superior isolation at 5M at 500 Vdc
- Primary Dielectric strength / superior secondary at 3 KV , 1min.
- The wide range of HR toroidal transformers goes from 8VA to 20KVA.
- Winding identification for colour references

ELECTRICAL CHARACTERISTICS

POWER	Series	PRIMARY 230V 50/60Hz											Wheight (kg)
		SINGLE SECONDARY (--) V.											
					18V	22V	24V	30V	35V	40V	60V	80V	
250VA	REF				T 025 118	T 025 122	T 025 124	T 025 130	T 025 135	T 025 140	T 025 160	T 025 180	2.43
	Is-A				13.8	11.3	10.4	8.33	7.57	6.25	4.16	3.12	

POWER	Series	PRIMARY 230V 50/60Hz										Wheight (kg)
		DUAL SECONDARY 2 X(--) V.										
				2x12V	2x15V	2x18V	2x22V	2x24V	2x30V	2x35V	2x40V	
250VA	REF			T 025 212	T 025 215	T 025 218	T 025 222	T 025 224	T 025 230	T 025 235	T 025 240	2.43
	Is-A			2x10.4	2x8.33	2x6.95	2x5.68	2x5.20	2x4.17	2x3.57	2x3.13	

MECHANICAL INFORMATION

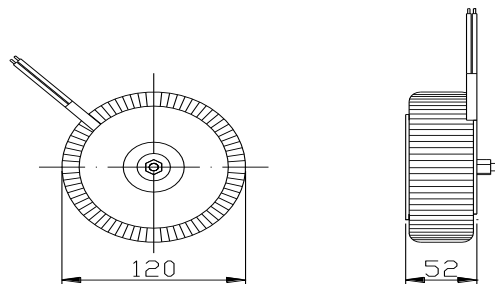

dim are mm