



TOROIDAL TRANSFORMERS

T150 1500VA 40°C/B



www.efiter.com

[home>>index](#)

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection

TECHNICAL SPECIFICATIONS


- Power 1500VA 40°C/B
- Configuration of primary/secondary single, dual or multiple allow get any required
- The toroidal transformers have a lot more advantages than the conventional and encapsulated ones
- Their use is highly recommended due to their improvements in radiation,
- Designed and manufactured according regulations EN61558-1
- Double isolation copper wire
- Ambient temperature of 40°C/104°F
- Magnetic core of grain-oriented silicon steel
- Superior isolation at 5M at 500 Vdc
- Primary Dielectric strength / superior secondary at 3 KV , 1min.
- The wide range of HR toroidal transformers goes from 8VA to 20KVA. •
- Winding identification for colour references

ELECTRICAL CHARACTERISTICS

POWER	Series	PRIMARY 230V 50/60Hz								Wheight (kg)
		SINGLE SECONDARY (--) V.								
		60V	80V	100V	120V					
1500VA	REF	T 150 160	T 150 180	T 150 500	T 150 520					10.6
	Is-A	25.0	18.7	15	12.5					

POWER	Series	PRIMARY 230V 50/60Hz								Wheight (kg)
		DUAL SECONDARY 2 X(--) V.								
		2X30V	2X35V	2X40V	2X50V	2X55V	2X60V	2X80V		
1500VA	REF	T 150 230	T 150 235	T 150 240	T 150 250	T 150 255	T 150 260	T 150 280		10.6
	Is-A	2x25	2x21.42	2x18.75	2x15	2x13.63	2x12.5	2x9.38		

MECHANICAL INFORMATION

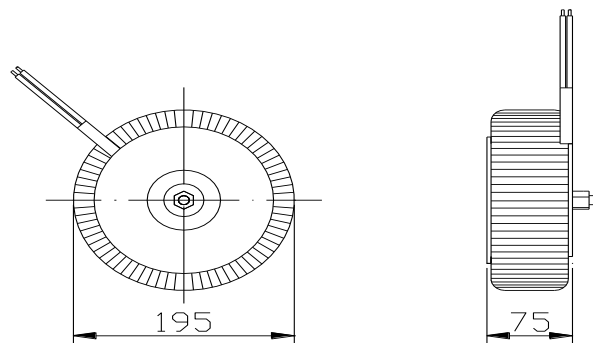

dim are mm