



# U4817 (UI 48/17)

45VA - Ta40°B

40VA - Ta70°B




www.efiter.com

weight - 700gr.

## ENCAPSULATED TRANSFORMERS

[home>>index](#)


According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection

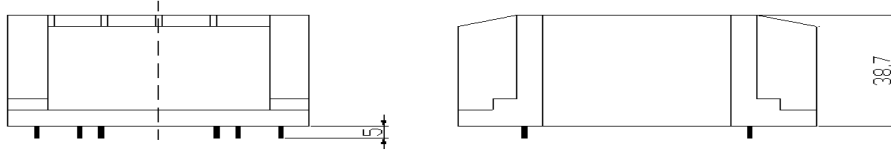

### 45VA. Ta°40B

HR REFERENCE		Vo/Vsec=1,2 Vo --> Is=0 Vsec --> Isec=In		Prot. Prim. 230V: 160mA/T 115V: 315mA/T
U48170xx	U48175xx	Vsec	Isec	Prot. Sec. mA/F
U4817007	U4817507	2x4,5V	2x5000mA	2x55000mA
U4817000	U4817500	2x6V	2x37500mA	2x38000mA
U4817001	U4817501	2x7,5V	2x3214mA	2x3250mA
U4817002	U4817502	2x9V	2x2500mA	2x2550mA
U4817003	U4817503	2x12V	2x1875mA	2x1900mA
U4817004	U4817504	2x15V	2x1500mA	2x1550mA
U4817005	U4817505	2x18V	2x1250mA	2x1300mA
U4817006	U4817506	2x24V	2x935mA	2x975mA


### U48xx0xx

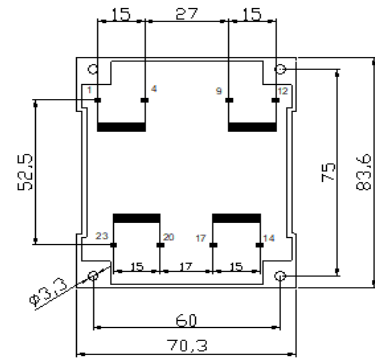


### 50VA. Ta°70B

HR REFERENCE		Vo/Vsec=1,2 Vo --> Is=0 Vsec --> Isec=In		Prot. Prim. 230V: 160mA/T 115V: 315mA/T
U48170xx	U48175xx	Vsec	Isec	Prot. Sec. mA/F
U4817057	U4817557	2x4,5V	2x5555mA	2x56000mA
U4817050	U4817550	2x6V	2x4166mA	2x4175mA
U4817051	U4817551	2x7,5V	2x3333mA	2x3350mA
U4817052	U4817552	2x9V	2x2777mA	2x2800mA
U4817053	U4817553	2x12V	2x2083mA	2x2100mA
U4817054	U4817554	2x15V	2x1666mA	2x17000mA
U4817055	U4817555	2x18V	2x1388mA	2x1400mA
U4817056	U4817556	2x24V	2x1041mA	2x1050mA


### U48xx5xx

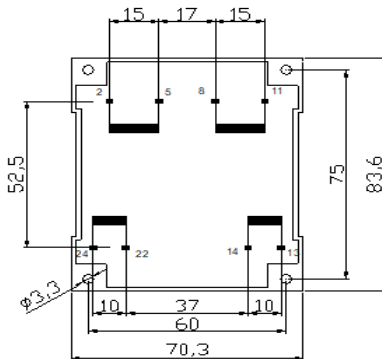

#### Primary connections

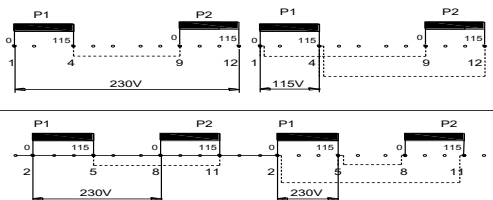

#### Secondary connections

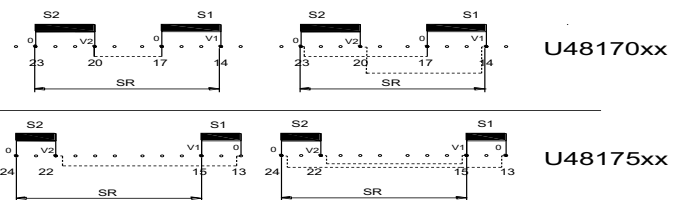

Vsr=V1+V2  
Isr=I1

Vsr=V1  
Isr=I1+I2

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 .