




U3921 (UI 39/21)

30VA - Ta40°C

24VA - Ta70°C





www.efiter.com

weight - 545gr.

ENCAPSULATED TRANSFORMERS

[home>>index](#)


According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection

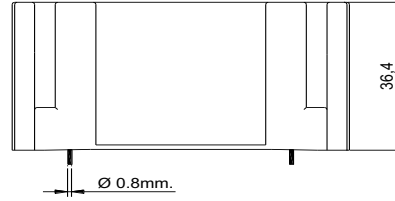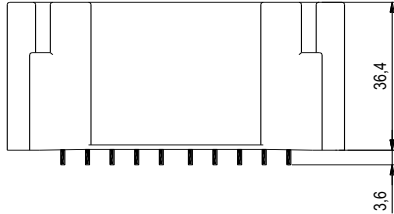

30VA. Ta40°C

HR REFERENCE		Vo/Vsec=1,2 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 160mA/T 115V: 315mA/T
U39140xx	U39145xx	Vsec	Isec	Prot. Sec. mA/F
U3921007	U3921507	2x4,5V	2x3333mA	2x4000mA
U3921000	U3921500	2x6V	2x2500mA	2x3150mA
U3921001	U3921501	2x7,5V	2x2000mA	2x2500mA
U3921002	U3921502	2x9V	2x1666mA	2x2000mA
U3921003	U3921503	2x12V	2x1250mA	2x1600mA
U3921004	U3921504	2x15V	2x1000mA	2x1250mA
U3921005	U3921505	2x18V	2x833mA	2x1000mA
U3921006	U3921506	2x24V	2x625mA	2x800mA


U39xx0xx

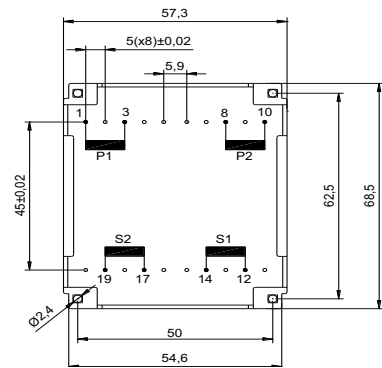


24VA. Ta70°C

HR REFERENCE		Vo/Vsec=1,2 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 160mA/T 115V: 315mA/T
U39140xx	U39145xx	Vsec	Isec	Prot. Sec. mA/F
U3921057	U3921557	2x4,5V	2x2666mA	2x3150mA
U3921050	U3921550	2x6V	2x2000mA	2x2500mA
U3921051	U3921551	2x7,5V	2x1600mA	2x2000mA
U3921052	U3921552	2x9V	2x1333mA	2x1600mA
U3921053	U3921553	2x12V	2x1000mA	2x1250mA
U3921054	U3921554	2x15V	2x800mA	2x1000mA
U3921055	U3921555	2x18V	2x666mA	2x800mA
U3921056	U3921556	2x24V	2x500mA	2x630mA


U39xx5xx

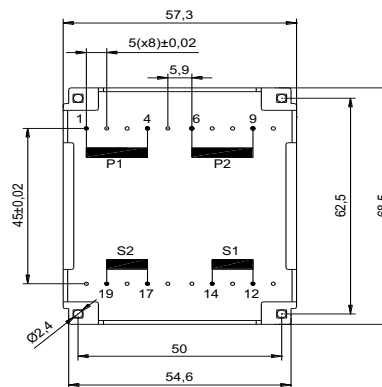

Primary connections

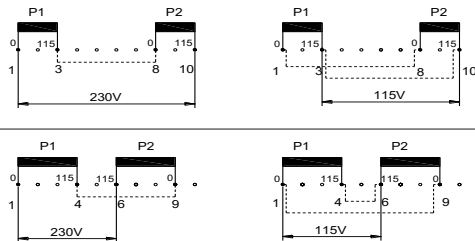

Secondary connections

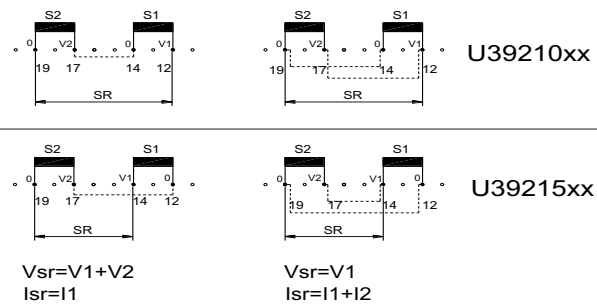

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 .