



E3018 GREEN SERIES

EI 30/18 2,8VA - Ta40°C

weight - 115gr.

www.efiter.com

[home>>index](#)





CE US




EuP ENCAPSULATED TRANSFORMERS

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 - Short circuit proof




SINGLE SECONDARY, 2,8VA. Ta40°C

HR REFERENCE		Vo/Vsec=1,7 Vo --> Is=0 Vsec --> Isec=In		Protection
Prim. 230V	Prim. 115V	Vsec	Isec	
E3018814	E3018914	4,5V	622mA	Short circuit proof
E3018800	E3018900	6V	466mA	
E3018802	E3018902	7,5V	373mA	
E3018804	E3018904	9V	311mA	
E3018806	E3018906	12V	233mA	
E3018808	E3018908	15V	186mA	
E3018810	E3018910	18V	155mA	
E3018812	E3018912	24V	116mA	

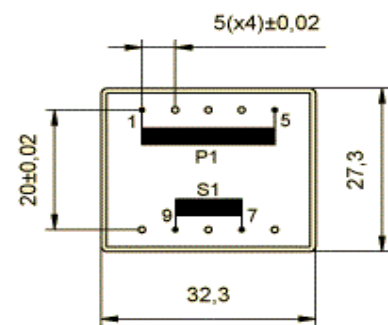


DUAL SECONDARY, 2,8VA. Ta40°C

HR REFERENCE		Vo/Vsec=1,7 Vo --> Is=0 Vsec --> Isec=In		Protection
Prim. 230V	Prim. 115V	Vsec	Isec	
E3018815	E3018915	2x4,5V	2x311mA	Short circuit proof
E3018801	E3018901	2x6V	2x233mA	
E3018803	E3018903	2x7,5V	2x186mA	
E3018805	E3018905	2x9V	2x155mA	
E3018807	E3018907	2x12V	2x116mA	
E3018809	E3018909	2x15V	2x93mA	
E3018811	E3018911	2x18V	2x77mA	
E3018813	E3018913	2x24V	2x58mA	

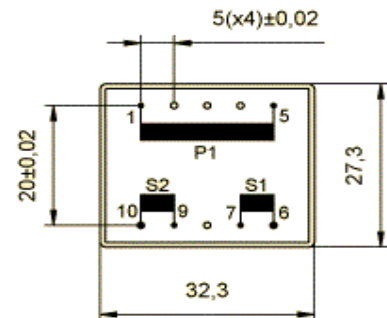

CENTER TAPPED, 2,8VA. Ta40°C

HR REFERENCE		Vo/Vsec=1,7 Vo --> Is=0 Vsec --> Isec=In		Protection
Prim. 230V	Prim. 115V	Vsec	Isec	
E3018835	E3018935	2x4,5V	2x311mA	Short circuit proof
E3018821	E3018921	2x6V	2x233mA	
E3018823	E3018923	2x7,5V	2x186mA	
E3018825	E3018925	2x9V	2x155mA	
E3018827	E3018927	2x12V	2x116mA	
E3018829	E3018929	2x15V	2x93mA	
E3018831	E3018931	2x18V	2x77mA	
E3018833	E3018933	2x24V	2x58mA	

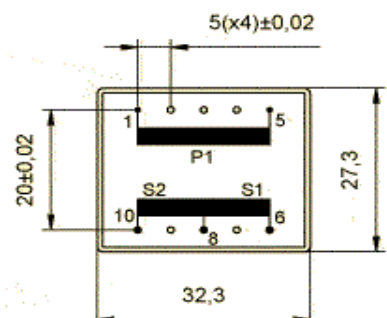

EuP (Energy-using products) law starting in 2023

VDE certification: Vin 230V - Vout 4,5...24V or 2x4,5V...2x12V models aproved. File 40044904