




ENCAPSULATED TOROIDAL TRANSFORMERS

TE01 1.6VA 60°C/B

www.efiter.com

home>>index

g EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External pi




TECHNICAL SPECIFICATIONS


- Power 1.6VA 60°C/B
- Configuration of primary/secondary dual or multiple allow get any required.
- The toroidal transformers have a lot more advantages than the conventional and encapsulated ones
- Their use is highly recommended due to their improvements in radiation,
- Designed and manufactured according regulations EN61558-1
- Double isolation copper wire
- Ambient temperature of 60°C/104°F
- Magnetic core of grain-oriented silicon steel
- Superior isolation at 5M at 500 Vdc
- Primary Dielectric strength / superior secondary at 3 KV , 1min.
- The wide range of HR toroidal transformers goes from 1.6VA to 50VA.

MODEL	Vin ac Pins 6/5 & 4/3	V sec. Open Pins 11/12 & 13/14	V sec. Full Load	Current mA / 1,6VA
TE01 000	2 x 115 Vac	2 x 10,6V	2 x 7V	2 x 114 mA
TE01 001	2 x 115 Vac	2 x 13,6V	2 x 9V	2 x 88 mA
TE01 002	2 x 115 Vac	2 x 18,2V	2 x 12 V	2 x 66 mA
TE01 003	2 x 115 Vac	2 x 22,6V	2 x 15 V	2 x 53 mA
TE01 004	2 x 115 Vac	2 x 27,3V	2 x 18 V	2 x 44 mA
TE01 005	2 x 115 Vac	2 x 33,3V	2 x 22 V	2 x 36 mA

MECHANICAL INFORMATION

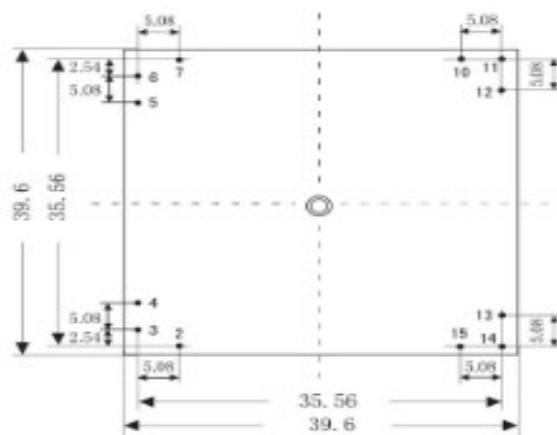


Bottom view

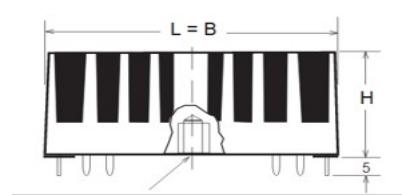

- L=B=39.6mm
- H=18.5mm

Schematic Diagram:



Series connection: 4-5 short connection, 3-6 input
Parallel connection: 4-6 short connection, 3-5 input