



U3006 (UI 30/5,5)

3VA - Ta40°C


2,4VA - Ta70°C

www.efiter.com

weight - 130gr.



[home>>index](#)

CE US



ENCAPSULATED TRANSFORMERS


According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · Short circuit proof

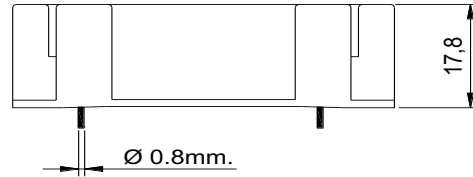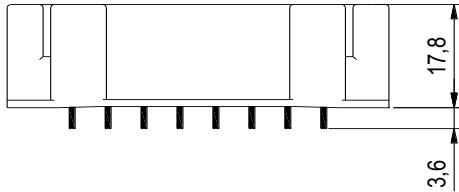

3VA. Ta40B

HR REFERENCE		Vo/Vsec=1,7 Vo → Is=0 Vsec → Isc=In		Protection
U30060xx	U30065xx	Vsec	Isec	Short circuit proof
U3006007	U3006507	2x4,5V	2x333mA	
U3006000	U3006500	2x6V	2x250mA	
U3006001	U3006501	2x7,5V	2x200mA	
U3006002	U3006502	2x9V	2x166mA	
U3006003	U3006503	2x12V	2x125mA	
U3006004	U3006504	2x15V	2x100mA	
U3006005	U3006505	2x18V	2x83mA	
U3006006	U3006506	2x24V	2x62mA	


U30xx0xx

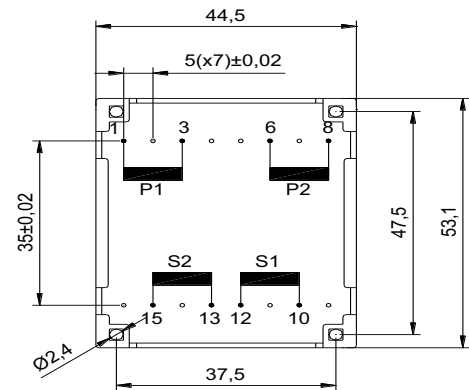


2,4VA. Ta70B

HR REFERENCE		Vo/Vsec=1,7 Vo → Is=0 Vsec → Isc=In		Protection
U30060xx	U30065xx	Vsec	Isec	Short circuit proof
U3006057	U3006557	2x4,5V	2x266mA	
U3006050	U3006550	2x6V	2x200mA	
U3006051	U3006551	2x7,5V	2x160mA	
U3006052	U3006552	2x9V	2x133mA	
U3006053	U3006553	2x12V	2x100mA	
U3006054	U3006554	2x15V	2x80mA	
U3006055	U3006555	2x18V	2x66mA	
U3006056	U3006556	2x24V	2x50mA	


U30xx5xx

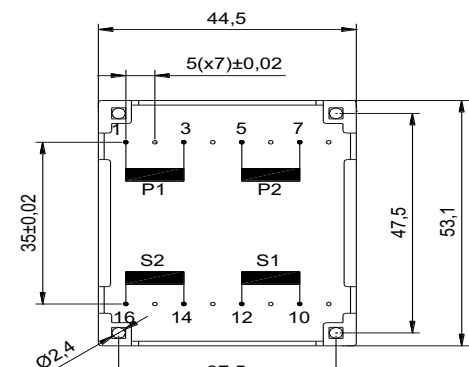

Primary connections

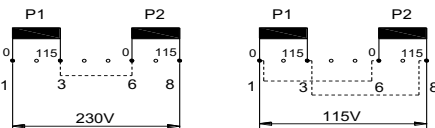

Secondary connections

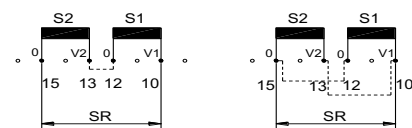

U30060xx

U30065xx

Vsr=V1+V2
Isr=I1

Vsr=V1
Isr=I1+I2

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 .