



C4215 (EI 42)

5VA - Ta70°B

Dim:35x42x29,8mm




www.efiter.com

[home>>index](#)


OPEN FRAME TRANSFORMERS

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection

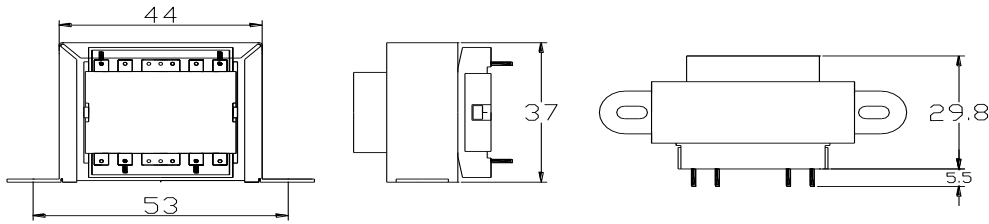


SINGLE SECONDARY, 5,0VA. Ta70B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C4215064	C4215164	4,5V	1111mA	1200mA
C4215050	C4215150	6V	833mA	900mA
C4215052	C4215152	7,5V	667mA	700mA
C4215054	C4215154	9V	556mA	400mA
C4215056	C4215156	12V	417mA	600mA
C4215058	C4215158	15V	333mA	350mA
C4215060	C4215160	18V	278mA	300mA
C4215070	C4215170	20V	250mA	275mA
C4215062	C4215172	24V	208mA	250mA

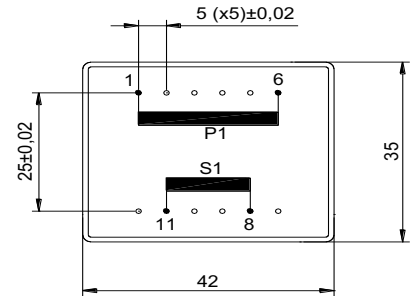


DUAL SECONDARY, 5,0VA. Ta70B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C4215065	C4215165	2x4,5V	2x556mA	2x600mA
C4215051	C4215151	2x6V	2x417mA	2x500mA
C4215053	C4215153	2x7,5V	2x333mA	2x375mA
C4215055	C4215155	2x9V	2x278mA	2x300mA
C4215057	C4215157	2x12V	2x208mA	2x250mA
C4215059	C4215159	2x15V	2x167mA	2x175mA
C4215061	C4215161	2x18V	2x139mA	2x150mA
C4215069	C4215169	2x20V	2x125mA	2x150mA
C4215063	C4215163	2x24V	2x104mA	2x125mA

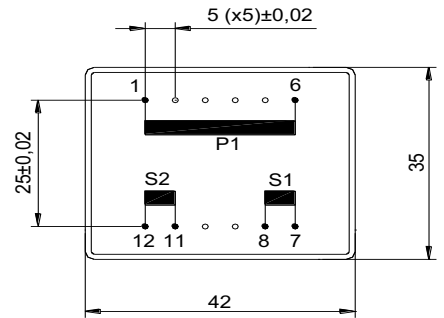

CENTER TAPPED, 5,0VA. Ta70B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C4215085	C4215185	2x4,5V	2x556mA	2x600mA
C4215071	C4215171	2x6V	2x417mA	2x500mA
C4215073	C4215173	2x7,5V	2x333mA	2x375mA
C4215075	C4215175	2x9V	2x278mA	2x300mA
C4215077	C4215177	2x12V	2x208mA	2x250mA
C4215079	C4215179	2x15V	2x167mA	2x175mA
C4215081	C4215181	2x18V	2x139mA	2x150mA
C4215089	C4215189	2x20V	2x125mA	2x150mA
C4215083	C4215183	2x24V	2x104mA	2x125mA

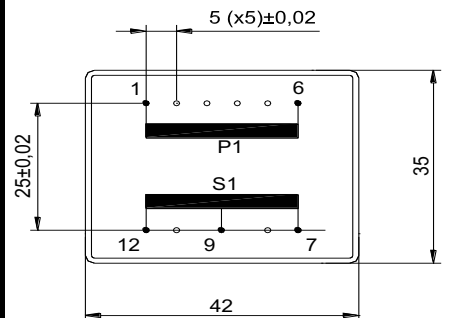

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085