



# C4215 (EI 42)

7VA - Ta40°B

Dim:35x42x29,8mm




[www.efiter.com](http://www.efiter.com)

[home>>index](#)


## OPEN FRAME TRANSFORMERS

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection

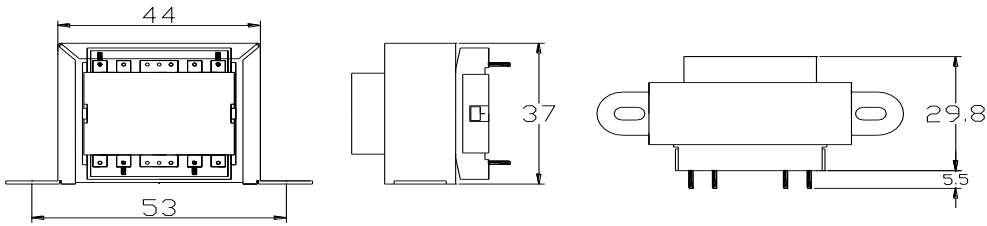


### SINGLE SECONDARY, 7VA. Ta°40B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C4215014	C4215114	4,5V	1556mA	1600mA
C4215000	C4215100	6V	1167mA	1200mA
C4215002	C4215102	7,5V	933mA	1000mA
C4215004	C4215104	9V	778mA	800mA
C4215006	C4215106	12V	583mA	600mA
C4215008	C4215108	15V	467mA	500mA
C4215010	C4215110	18V	389mA	400mA
C4215020	C4215120	20V	350mA	375mA
C4215012	C4215112	24V	292mA	300mA

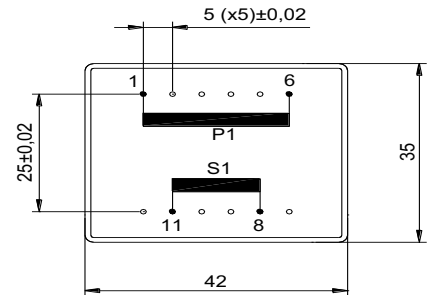


### DUAL SECONDARY, 7VA. Ta°40B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C4215015	C4215115	2x4,5V	2x778mA	2x800mA
C4215001	C4215101	2x6V	2x583mA	2x600mA
C4215003	C4215103	2x7,5V	2x467mA	2x250mA
C4215005	C4215105	2x9V	2x389mA	2x400mA
C4215007	C4215107	2x12V	2x292mA	2x300mA
C4215009	C4215109	2x15V	2x233mA	2x250mA
C4215011	C4215111	2x18V	2x194mA	2x200mA
C4215019	C4215119	2x20V	2x175mA	2x100mA
C4215013	C4215113	2x24V	2x146mA	2x200mA

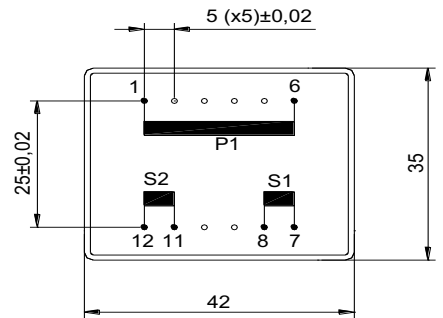

### CENTER TAPPED, 7VA. Ta°40B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C4215035	C4215135	2x4,5V	2x778mA	2x800mA
C4215021	C4215121	2x6V	2x583mA	2x600mA
C4215023	C4215123	2x7,5V	2x467mA	2x250mA
C4215025	C4215125	2x9V	2x389mA	2x400mA
C4215027	C4215127	2x12V	2x292mA	2x300mA
C4215029	C4215129	2x15V	2x233mA	2x250mA
C4215031	C4215131	2x18V	2x194mA	2x200mA
C4215039	C4215139	2x20V	2x175mA	2x100mA
C4215033	C4215133	2x24V	2x146mA	2x200mA

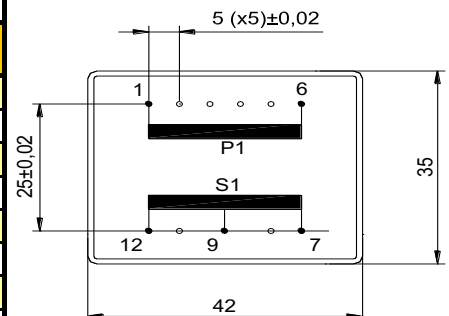

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085