



C4817 (EI 48)

8,0VA - Ta70°B

Dim:40x48x34,8mm




www.efiter.com

[home>>index](#)


OPEN FRAME TRANSFORMERS

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection

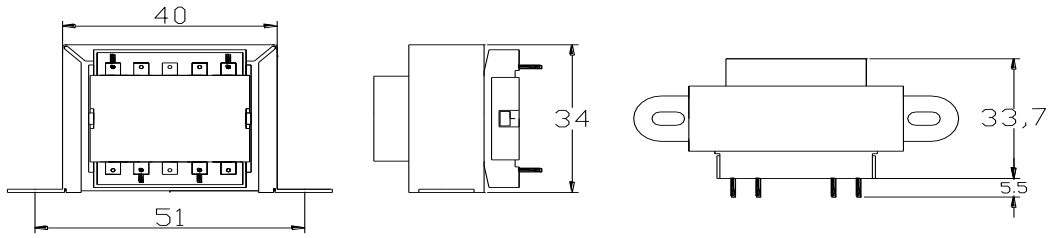


SINGLE SECONDARY, 8,0VA. Ta70B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C4810564	C4817164	4,5V	1778mA	1800mA
C4817050	C4817150	6V	1333mA	1450mA
C4817052	C4817152	7,5V	1067mA	1100mA
C4817054	C4817154	9V	889mA	900mA
C4817056	C4817156	12V	667mA	675mA
C4817058	C4817158	15V	533mA	550mA
C4817060	C4817160	18V	444mA	475mA
C4817070	C4817170	20V	400mA	450mA
C4817062	C4817172	24V	333mA	375mA

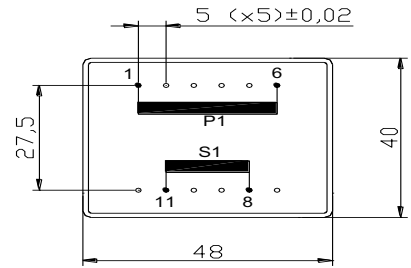


DUAL SECONDARY, 8,0VA. Ta70B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C4817065	C4817165	2x4,5V	2x889mA	2x900mA
C4817051	C4817151	2x6V	2x667mA	2x700mA
C4817053	C4817153	2x7,5V	2x533mA	2x575mA
C4817055	C4817155	2x9V	2x444mA	2x500mA
C4817057	C4817157	2x12V	2x333mA	2x350mA
C4817059	C4817159	2x15V	2x267mA	2x275mA
C4817061	C4817161	2x18V	2x222mA	2x250mA
C4817069	C4817169	2x20V	2x200mA	2x225mA
C4817063	C4817163	2x24V	2x167mA	2x175mA

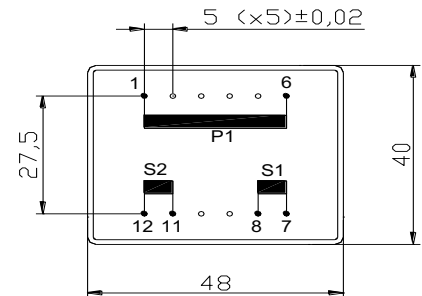

CENTER TAPPED, 8,0VA. Ta70B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C4825085	C4817185	2x4,5V	2x889mA	2x900mA
C4817071	C4817171	2x6V	2x667mA	2x700mA
C4817073	C4817173	2x7,5V	2x533mA	2x575mA
C4817075	C4817175	2x9V	2x444mA	2x500mA
C4817077	C4817177	2x12V	2x333mA	2x350mA
C4817079	C4817179	2x15V	2x267mA	2x275mA
C4817081	C4817181	2x18V	2x222mA	2x250mA
C4817089	C4817189	2x20V	2x200mA	2x225mA
C4817083	C4817183	2x24V	2x167mA	2x175mA

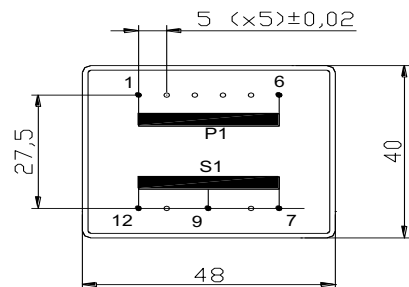

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085