



# C4826 (EI 48)

14VA - Ta40°B

Dim:40x48x43,5mm




[www.efiter.com](http://www.efiter.com)

[home>>index](#)


## OPEN FRAME TRANSFORMERS

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection

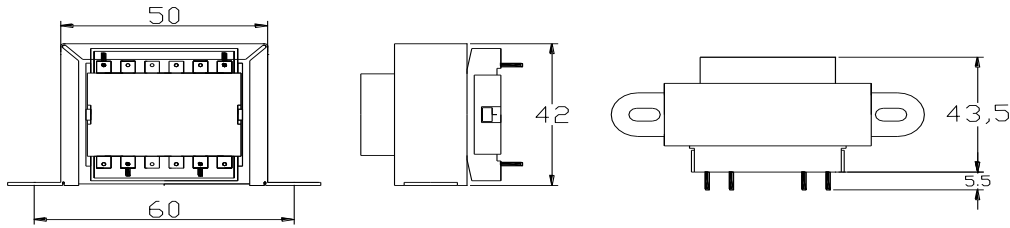


### SINGLE SECONDARY, 14VA. Ta°40B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C4826014	C4826114	4,5V	3111mA	3150mA
C4826000	C4826100	6V	2333mA	2400mA
C4826002	C4826102	7,5V	1867mA	1900mA
C4826004	C4826104	9V	1556mA	1600mA
C4826006	C4826106	12V	1167mA	1200mA
C4826008	C4826108	15V	933mA	1000mA
C4826010	C4826110	18V	778mA	800mA
C4826020	C4826120	20V	700mA	750mA
C4826012	C4826112	24V	583mA	600mA

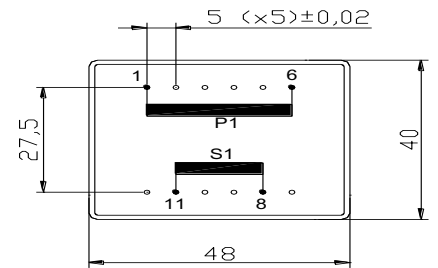


### DUAL SECONDARY, 14VA. Ta°40B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C4826015	C4826115	2x4,5V	2x1556mA	2x1600mA
C4826001	C4826101	2x6V	2x1167mA	2x1200mA
C4826003	C4826103	2x7,5V	2x993mA	2x1000mA
C4826005	C4826105	2x9V	2x778mA	2x800mA
C4826007	C4826107	2x12V	2x583mA	2x600mA
C4826009	C4826109	2x15V	2x467mA	2x500mA
C4826011	C4826111	2x18V	2x389mA	2x400mA
C4826019	C4826119	2x20V	2x350mA	2x375mA
C4826013	C4826113	2x24V	2x292mA	2x300mA

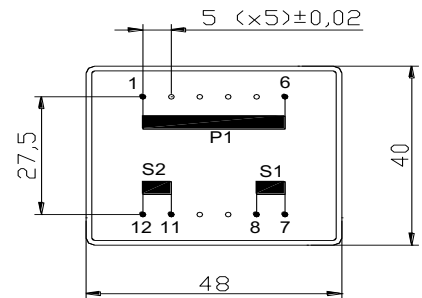

### CENTER TAPPED, 14VA. Ta°40B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C4826035	C4826135	2x4,5V	2x1556mA	2x1600mA
C4826021	C4826121	2x6V	2x1167mA	2x1200mA
C4826023	C4826123	2x7,5V	2x993mA	2x1000mA
C4826025	C4826125	2x9V	2x778mA	2x800mA
C4826027	C4826127	2x12V	2x583mA	2x600mA
C4826029	C4826129	2x15V	2x467mA	2x500mA
C4826031	C4826131	2x18V	2x389mA	2x400mA
C4826039	C4826139	2x20V	2x350mA	2x375mA
C4826033	C4826133	2x24V	2x292mA	2x300mA

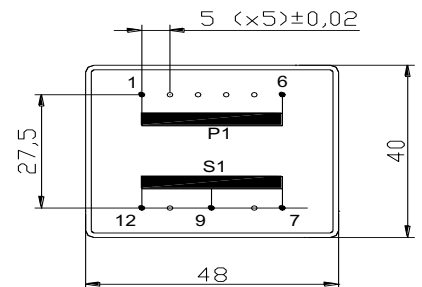

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085