



C6021 (EI 60)

20,0VA - Ta70°B

Dim:50x60x42,1mm




www.efiter.com

[home>>index](#)


OPEN FRAME TRANSFORMERS

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection

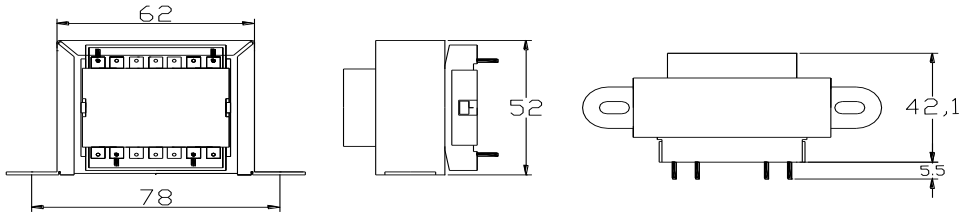


SINGLE SECONDARY, 20VA. Ta70B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C6021064	C6021164	4,5V	4444mA	4500mA
C6021050	C6021150	6V	3333mA	3400mA
C6021052	C6021152	7,5V	2667mA	2700mA
C6021054	C6021154	9V	2222mA	2300mA
C6021056	C6021156	12V	1667mA	1700mA
C6021058	C6021158	15V	1333mA	1400mA
C6021060	C6021160	18V	1111mA	1200mA
C6021070	C6021170	20V	1000mA	1100mA
C6021062	C6021172	24V	833mA	900mA

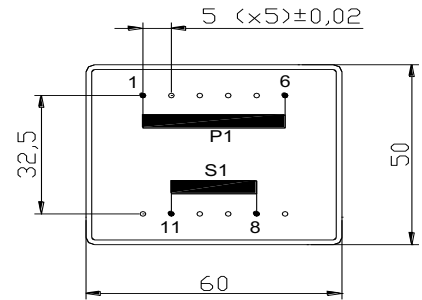


DUAL SECONDARY, 20VA. Ta70B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C6021065	C6021165	2x4,5V	2x2222mA	2x2300mA
C6021051	C6021151	2x6V	2x1667mA	2x1700mA
C6021053	C6021153	2x7,5V	2x1333mA	2x1400mA
C6021055	C6021155	2x9V	2x1111mA	2x1200mA
C6021057	C6021157	2x12V	2x833mA	2x900mA
C6021059	C6021159	2x15V	2x667mA	2x700mA
C6021061	C6021161	2x18V	2x556mA	2x600mA
C6021069	C6021169	2x20V	2x500mA	2x550mA
C6021063	C6021163	2x24V	2x417mA	2x500mA

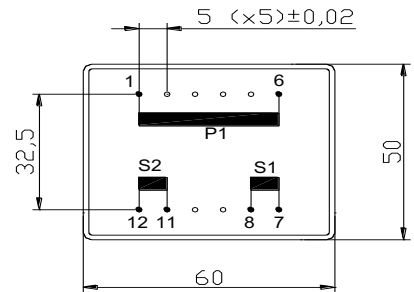

CENTER TAPPED, 20VA. Ta70B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C6025085	C6021185	2x4,5V	2x2222mA	2x2300mA
C6021071	C6021171	2x6V	2x1667mA	2x1700mA
C6021073	C6021173	2x7,5V	2x1333mA	2x1400mA
C6021075	C6021175	2x9V	2x1111mA	2x1200mA
C6021077	C6021177	2x12V	2x833mA	2x900mA
C6021079	C6021179	2x15V	2x667mA	2x700mA
C6021081	C6021181	2x18V	2x556mA	2x600mA
C6021089	C6021189	2x20V	2x500mA	2x550mA
C6021083	C6021183	2x24V	2x417mA	2x500mA

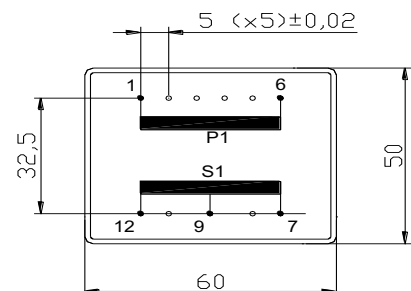

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085