




C6021 (EI 60)

25VA - Ta40°B

Dim:50x60x42,1mm




www.efiter.com

[home>>index](#)


OPEN FRAME TRANSFORMERS

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection

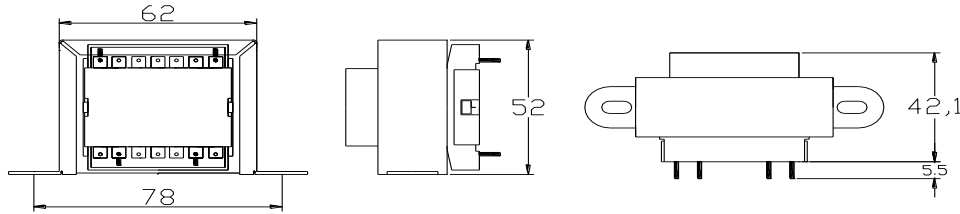


SINGLE SECONDARY, 25VA. Ta°40B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C6021014	C6021114	4,5V	5556mA	5600mA
C6021000	C6021100	6V	4167mA	4250mA
C6021002	C6021102	7,5V	3333mA	3450mA
C6021004	C6021104	9V	2778mA	2800mA
C6021006	C6021106	12V	2083mA	2100mA
C6021008	C6021108	15V	1667mA	1700mA
C6021010	C6021110	18V	1389mA	1400mA
C6021020	C6021120	20V	1250mA	1300mA
C6021012	C6021112	24V	1042mA	1100mA

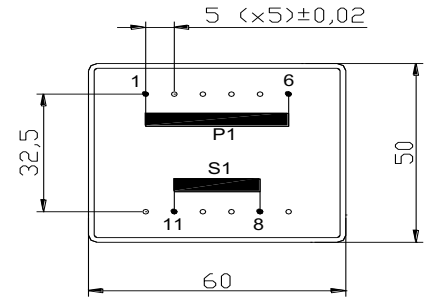


DUAL SECONDARY, 25VA. Ta°40B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C6021015	C6021115	2x4,5V	2x2778mA	2x2800mA
C6021001	C6021101	2x6V	2x2083mA	2x2100mA
C6021003	C6021103	2x7,5V	2x1667mA	2x1700mA
C6021005	C6021105	2x9V	2x1389mA	2x1400mA
C6021007	C6021107	2x12V	2x1042mA	2x1100mA
C6021009	C6021109	2x15V	2x833mA	2x900mA
C6021011	C6021111	2x18V	2x694mA	2x750mA
C6021019	C6021119	2x20V	2x625mA	2x700mA
C6021013	C6021113	2x24V	2x521mA	2x600mA

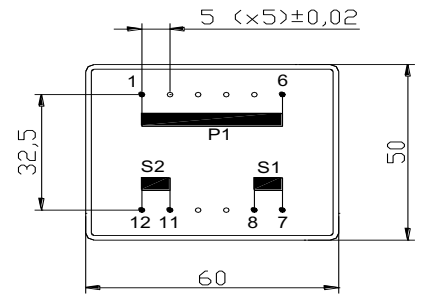

CENTER TAPPED, 25VA. Ta°40B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C6021035	C6021135	2x4,5V	2x2778mA	2x2800mA
C6021021	C6021121	2x6V	2x2083mA	2x2100mA
C6021023	C6021123	2x7,5V	2x1667mA	2x1700mA
C6021025	C6021125	2x9V	2x1389mA	2x1400mA
C6021027	C6021127	2x12V	2x1042mA	2x1100mA
C6021029	C6021129	2x15V	2x833mA	2x900mA
C6021031	C6021131	2x18V	2x694mA	2x750mA
C6021039	C6021139	2x20V	2x625mA	2x700mA
C6021033	C6021133	2x24V	2x521mA	2x600mA

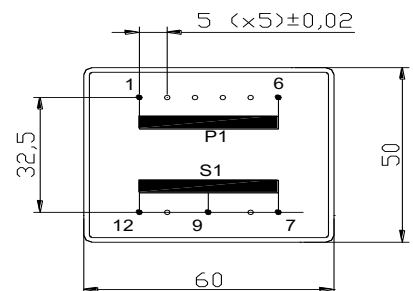

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085