



# C6631 (EI 66)

70VA - Ta40°C

Dim:55x66x54,3mm




[www.efiter.com](http://www.efiter.com)

[home>>index](#)


## OPEN FRAME TRANSFORMERS

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection

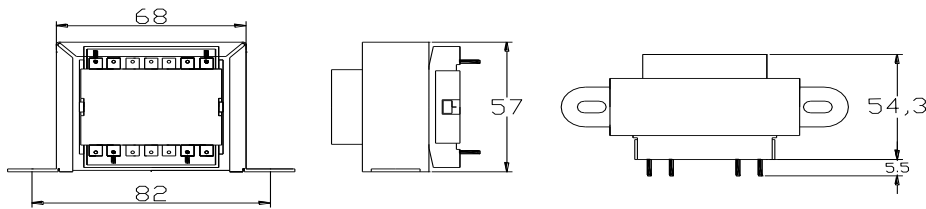


### SINGLE SECONDARY, 70VA. Ta=40°C

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C6631014	C6631114	4,5V	15556mA	16000mA
C6631000	C6631100	6V	11667mA	12000mA
C6631002	C6631102	7,5V	93333mA	10000mA
C6631004	C6631104	9V	7778mA	8000mA
C6631006	C6631106	12V	5833mA	315mA
C6631008	C6631108	15V	4667mA	6000mA
C6631010	C6631110	18V	3889mA	4000mA
C6631020	C6631120	20V	3500mA	3750mA
C6631012	C6631112	24V	2917mA	3000mA

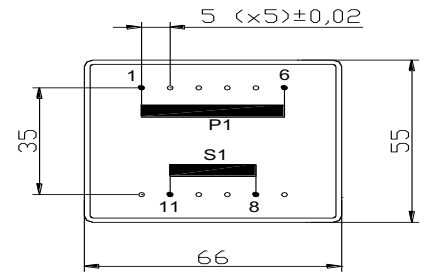


### DUAL SECONDARY, 70VA. Ta=40°C

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C6631015	C6631115	2x4,5V	2x7778mA	2x8000mA
C6631001	C6631101	2x6V	2x5833mA	2x6000mA
C6631003	C6631103	2x7,5V	2x4667mA	2x5000mA
C6631005	C6631105	2x9V	2x3889mA	2x4000mA
C6631007	C6631107	2x12V	2x2917mA	2x3000mA
C6631009	C6631109	2x15V	2x2333mA	2x2500mA
C6631011	C6631111	2x18V	2x1944mA	2x2000mA
C6631019	C6631119	2x20V	2x1750mA	2x2000mA
C6631013	C6631113	2x24V	2x1458mA	2x1500mA

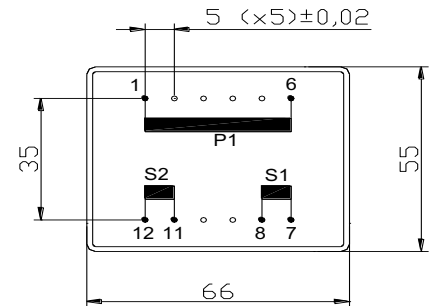

### CENTER TAPPED, 70VA. Ta=40°C

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C6631035	C6631135	2x4,5V	2x7778mA	2x8000mA
C6631021	C6631121	2x6V	2x5833mA	2x6000mA
C6631023	C6631123	2x7,5V	2x4667mA	2x5000mA
C6631025	C6631125	2x9V	2x3889mA	2x4000mA
C6631027	C6631127	2x12V	2x2917mA	2x3000mA
C6631029	C6631129	2x15V	2x2333mA	2x2500mA
C6631031	C6631131	2x18V	2x1944mA	2x2000mA
C6631039	C6631139	2x20V	2x1750mA	2x2000mA
C6631033	C6631133	2x24V	2x1458mA	2x1500mA

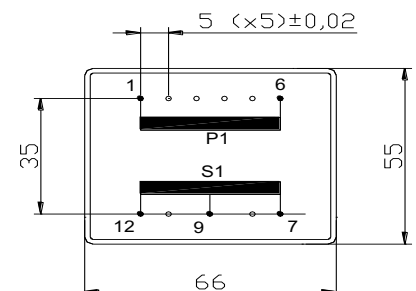

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085