




C7535 (EI 75)

100VA - Ta40°C

Dim:62x75x79mm

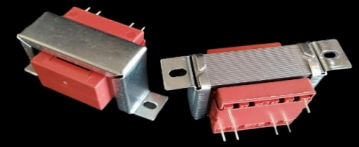


www.efiter.com

[home>>index](#)


OPEN FRAME TRANSFORMERS

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection

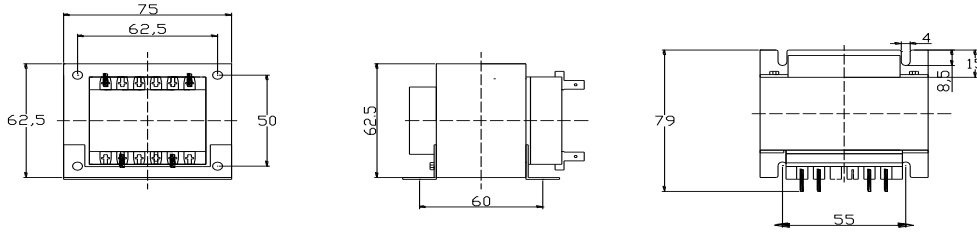


SINGLE SECONDARY, 100VA. Ta40°C

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C7535014	C7535114	4,5V	22222mA	25000mA
C7535000	C7535100	6V	16667mA	17000mA
C7535002	C7535102	7,5V	13333mA	15000mA
C7535004	C7535104	9V	11111mA	12000mA
C7535006	C7535106	12V	8333mA	10000mA
C7535008	C7535108	15V	6667mA	7000mA
C7535010	C7535110	18V	5556mA	6000mA
C7535020	C7535120	20V	5000mA	5500mA
C7535012	C7535112	24V	4167mA	5000mA

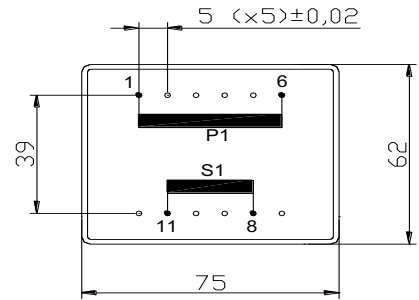


DUAL SECONDARY, 100VA. Ta40°C

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C7535015	C7535115	2x4,5V	2x11111mA	2x12000mA
C7535001	C7535101	2x6V	2x8333mA	2x9000mA
C7535003	C7535103	2x7,5V	2x6667mA	2x7500mA
C7535005	C7535105	2x9V	2x5556mA	2x6000mA
C7535007	C7535107	2x12V	2x4167mA	2x5000mA
C7535009	C7535109	2x15V	2x3333mA	2x3500mA
C7535011	C7535111	2x18V	2x2778mA	2x3000mA
C7535019	C7535119	2x20V	2x2500mA	2x2700mA
C7535013	C7535113	2x24V	2x2083mA	2x2100mA

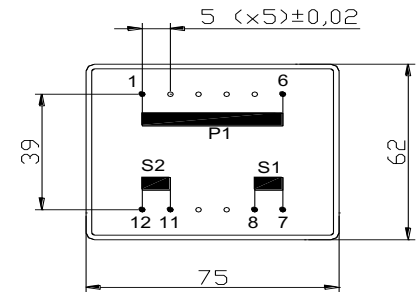

CENTER TAPPED, 100VA. Ta40°C

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C7535035	C7535135	2x4,5V	2x11111mA	2x12000mA
C7535021	C7535121	2x6V	2x8333mA	2x9000mA
C7535023	C7535123	2x7,5V	2x6667mA	2x7500mA
C7535025	C7535125	2x9V	2x5556mA	2x6000mA
C7535027	C7535127	2x12V	2x4167mA	2x5000mA
C7535029	C7535129	2x15V	2x3333mA	2x3500mA
C7535031	C7535131	2x18V	2x2778mA	2x3000mA
C7535039	C7535139	2x20V	2x2500mA	2x2700mA
C7535033	C7535133	2x24V	2x2083mA	2x2100mA

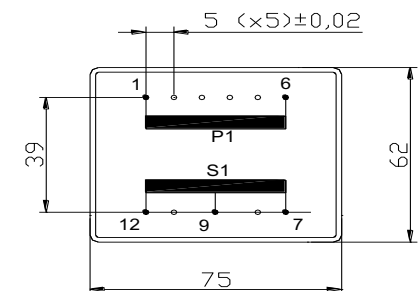

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085