



C7535 (EI 75)

85VA - Ta70°B

Dim:62x75x64,5mm




www.efiter.com

[home>>index](#)


OPEN FRAME TRANSFORMERS

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection

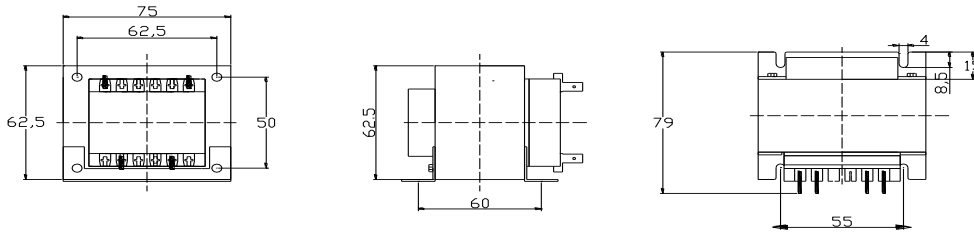


SINGLE SECONDARY, 85VA. Ta70B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C7535064	C7535164	4,5V	18889mA	19000mA
C7535050	C7535150	6V	14167mA	15000mA
C7535052	C7535152	7,5V	11333mA	12000mA
C7535054	C7535154	9V	9444mA	10000mA
C7535056	C7535156	12V	7083mA	8000mA
C7535058	C7535158	15V	5667mA	6000mA
C7535060	C7535160	18V	4722mA	5000mA
C7535070	C7535170	20V	4250mA	5000mA
C7535062	C7535172	24V	3542mA	4000mA

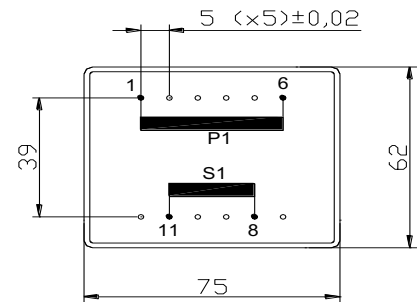


DUAL SECONDARY, 85VA. Ta70B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C7535065	C7535165	2x4,5V	2x9444mA	2x10000mA
C7535051	C7535151	2x6V	2x7083mA	2x8000mA
C7535053	C7535153	2x7,5V	2x5667mA	2x6000mA
C7535055	C7535155	2x9V	2x4722mA	2x5000mA
C7535057	C7535157	2x12V	2x3542mA	2x4000mA
C7535059	C7535159	2x15V	2x2833mA	2x3000mA
C7535061	C7535161	2x18V	2x2361mA	2x3000mA
C7535069	C7535169	2x20V	2x2125mA	2x2500mA
C7535063	C7535163	2x24V	2x1771mA	2x2000mA

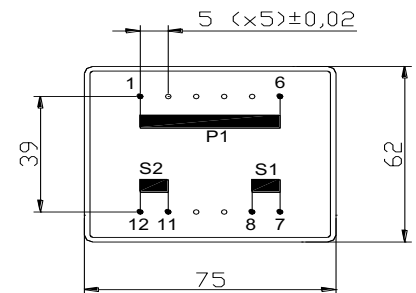

CENTER TAPPED, 85VA. Ta70B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C7525085	C7535185	2x4,5V	2x9444mA	2x10000mA
C7535071	C7535171	2x6V	2x7083mA	2x8000mA
C7535073	C7535173	2x7,5V	2x5667mA	2x6000mA
C7535075	C7535175	2x9V	2x4722mA	2x5000mA
C7535077	C7535177	2x12V	2x3542mA	2x4000mA
C7535079	C7535179	2x15V	2x2833mA	2x3000mA
C7535081	C7535181	2x18V	2x2361mA	2x3000mA
C7535089	C7535189	2x20V	2x2125mA	2x2500mA
C7535083	C7535183	2x24V	2x1771mA	2x2000mA

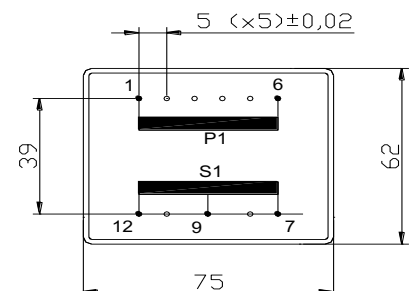

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085