



# C9640 (EI 96)

150VA - Ta70°B

Dim:80x96x79,6mm




[www.efiter.com](http://www.efiter.com)

[home>>index](#)


## OPEN FRAME TRANSFORMERS

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection

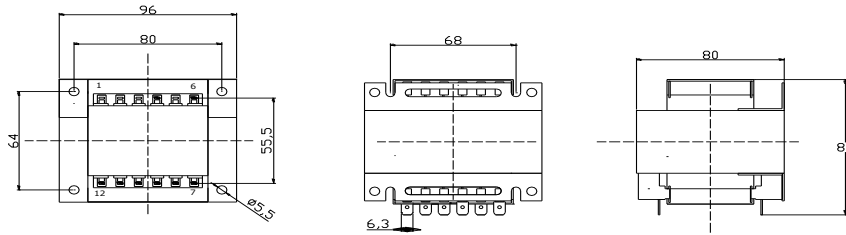


### SINGLE SECONDARY, 150VA. Ta70B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C9640064	C9640164	4,5V	33333mA	35000mA
C9640050	C9640150	6V	25000mA	26000mA
C9640052	C9640152	7,5V	20000mA	21000mA
C9640054	C9640154	9V	16667mA	17000mA
C9640056	C9640156	12V	12500mA	13000mA
C9640058	C9640158	15V	10000mA	11000mA
C9640060	C9640160	18V	8333mA	9000mA
C9640070	C9640170	20V	7500mA	8000mA
C9640062	C9640172	24V	6250mA	7000mA

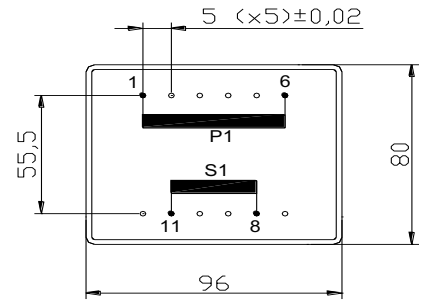


### DUAL SECONDARY, 150VA. Ta70B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C9640065	C9640165	2x4,5V	2x16667mA	2x17000mA
C9640051	C9640151	2x6V	2x12500mA	2x13000mA
C9640053	C9640153	2x7,5V	2x10000mA	2x11000mA
C9640055	C9640155	2x9V	2x8333mA	2x9000mA
C9640057	C9640157	2x12V	2x6250mA	2x7000mA
C9640059	C9640159	2x15V	2x5000mA	2x6000mA
C9640061	C9640161	2x18V	2x4167mA	2x5000mA
C9640069	C9640169	2x20V	2x3750mA	2x4000mA
C9640063	C9640163	2x24V	2x3125mA	2x4000mA

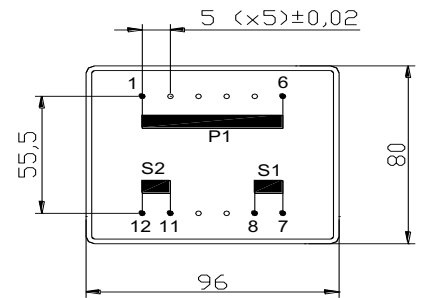

### CENTER TAPPED, 150VA. Ta70B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
C9640085	C9640185	2x4,5V	2x16667mA	2x17000mA
C9640071	C9640171	2x6V	2x12500mA	2x13000mA
C9640073	C9640173	2x7,5V	2x10000mA	2x11000mA
C9640075	C9640175	2x9V	2x8333mA	2x9000mA
C9640077	C9640177	2x12V	2x6250mA	2x7000mA
C9640079	C9640179	2x15V	2x5000mA	2x6000mA
C9640081	C9640181	2x18V	2x4167mA	2x5000mA
C9640089	C9640189	2x20V	2x3750mA	2x4000mA
C9640083	C9640183	2x24V	2x3125mA	2x4000mA

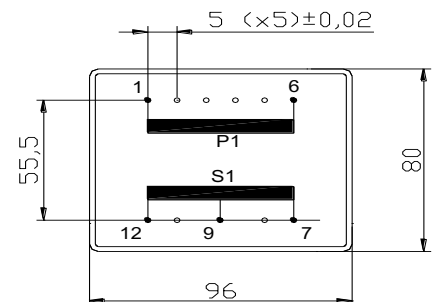

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085