



# E3808 (EI 38/13,6)

2,1VA - Ta<sup>40</sup>B

weight - 150gr.




[www.efiter.com](http://www.efiter.com)

[home>>index](#)


## ENCAPSULATED TRANSFORMERS

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection

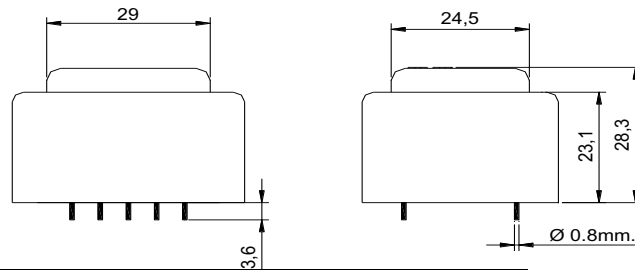


### SINGLE SECONDARY, 2,1VA. Ta<sup>40</sup>B

HR REFERENCE		Vo/Vsec=1,4 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 32mA/T 115V: 64mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
E3808014	E3808114	4,5V	466mA	500mA
E3808000	E3808100	6V	350mA	375mA
E3808002	E3808102	7,5V	280mA	300mA
E3808004	E3808104	9V	233mA	250mA
E3808006	E3808106	12V	175mA	200mA
E3808008	E3808108	15V	140mA	150mA
E3808010	E3808110	18V	116mA	125mA
E3808012	E3808112	24V	87mA	100mA

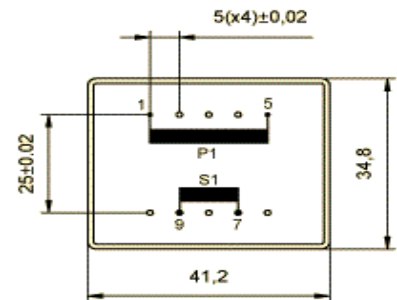


### DUAL SECONDARY, 2,1VA. Ta<sup>40</sup>B

HR REFERENCE		Vo/Vsec=1,4 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V:32mA/T 115V:64mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
E3808015	E3808115	2x4,5V	2x233mA	2x500mA
E3808001	E3808101	2x6V	2x175mA	2x250mA
E3808003	E3814103	2x7,5V	2x140mA	2x150mA
E3808005	E3808105	2x9V	2x116mA	2x125mA
E3808007	E3808107	2x12V	2x87mA	2x100mA
E3808009	E3808109	2x15V	2x70mA	2x75mA
E3808011	E3808111	2x18V	2x58mA	2x65mA
E3808013	E3808113	2x24V	2x43mA	2x50mA

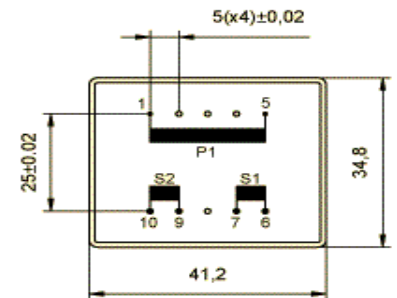

### CENTER TAPPED, 2,1 Ta<sup>40</sup>B

HR REFERENCE		Vo/Vsec=1,4 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V:32mA/T 115V:64mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
E3808035	E3808135	2x4,5V	2x233mA	2x500mA
E3808021	E3808121	2x6V	2x175mA	2x250mA
E3808023	E3808123	2x7,5V	2x140mA	2x150mA
E3808025	E3808125	2x9V	2x116mA	2x125mA
E3808027	E3808127	2x12V	2x87mA	2x100mA
E3808029	E3808129	2x15V	2x70mA	2x75mA
E3808031	E3808131	2x18V	2x58mA	2x65mA
E3808033	E3808133	2x24V	2x43mA	2x50mA

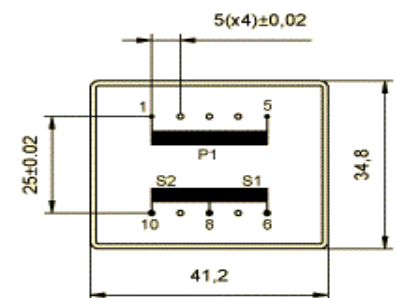

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 .