



E3814 (EI 38/13,6)

3,5VA - Ta70°B

weight - 150gr.




www.efiter.com

[home>>index](#)


ENCAPSULATED TRANSFORMERS

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection

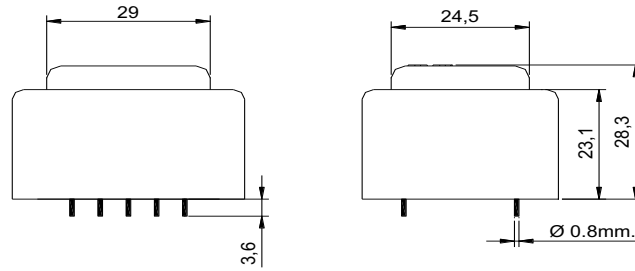


SINGLE SECONDARY, 3,5VA. Ta70°B

HR REFERENCE		Vo/Vsec=1,4 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 32mA/T 115V: 64mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
E3814064	E3814164	4,5V	777mA	800mA
E3814050	E3814150	6V	583mA	630mA
E3814052	E3814152	7,5V	466mA	500mA
E3814054	E3814154	9V	388mA	400mA
E3814056	E3814156	12V	291mA	315mA
E3814058	E3814158	15V	233mA	250mA
E3814060	E3814160	18V	194mA	200mA
E3814062	E3814162	24V	145mA	160mA

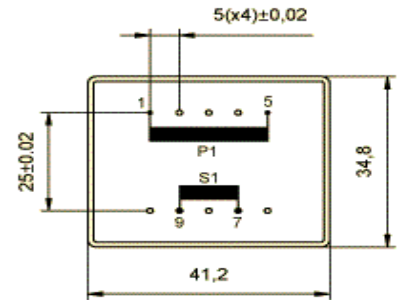


DUAL SECONDARY, 3,5VA. Ta70°B

HR REFERENCE		Vo/Vsec=1,4 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V:32mA/T 115V:64mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
E3814065	E3814165	2x4,5V	2x388mA	2x400mA
E3814051	E3814151	2x6V	2x291mA	2x315mA
E3814053	E3814153	2x7,5V	2x233mA	2x250mA
E3814055	E3814155	2x9V	2x194mA	2x200mA
E3814057	E3814157	2x12V	2x145mA	2x160mA
E3814059	E3814159	2x15V	2x116mA	2x125mA
E3814061	E3814161	2x18V	2x97mA	2x110mA
E3814063	E3814163	2x24V	2x72mA	2x80mA

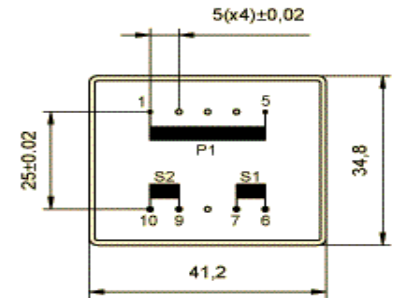

CENTER TAPPED, 3,5VA. Ta70°B

HR REFERENCE		Vo/Vsec=1,4 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V:32mA/T 115V:64mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
E3814085	E3814185	2x4,5V	2x388mA	2x400mA
E3814071	E3814171	2x6V	2x291mA	2x315mA
E3814073	E3814173	2x7,5V	2x233mA	2x250mA
E3814075	E3814175	2x9V	2x194mA	2x200mA
E3814077	E3814177	2x12V	2x145mA	2x160mA
E3814079	E3814179	2x15V	2x116mA	2x125mA
E3814081	E3814181	2x18V	2x97mA	2x110mA
E3814083	E3814183	2x24V	2x72mA	2x80mA

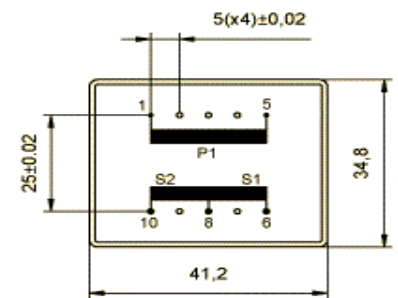

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 .