



E4209 (EI 42/9)

3,2VA - Ta⁴⁰B

weight - 205gr.




www.efiter.com

[home>>index](#)


ENCAPSULATED TRANSFORMERS

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection

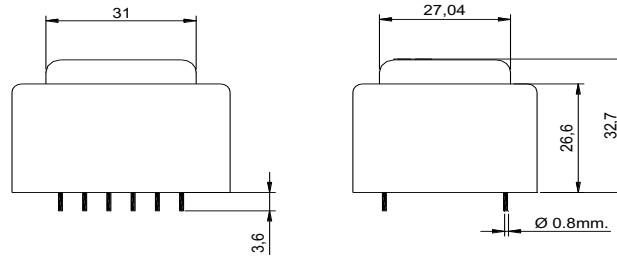


SINGLE SECONDARY, 3,2VA. Ta⁴⁰B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
E4209014	E4209114	4,5V	711mA	800mA
E4209000	E4209100	6V	533mA	630mA
E4209002	E4209102	7,5V	427mA	500mA
E4209004	E4209104	9V	356mA	400mA
E4209006	E4209106	12V	267mA	315mA
E4209008	E4209108	15V	213mA	250mA
E4209010	E4209110	18V	178mA	200mA
E4209012	E4209112	24V	133mA	160mA

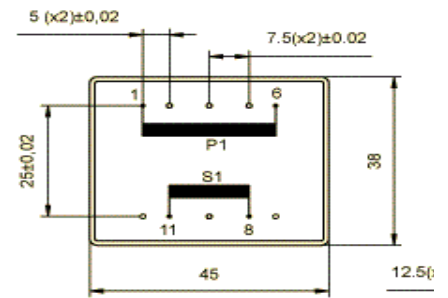


DUAL SECONDARY, 3,2VA. Ta⁴⁰B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
E4209015	E4209115	2x4,5V	2x356mA	2x400mA
E4209001	E4209101	2x6V	2x267mA	2x315mA
E4209003	E4209103	2x7,5V	2x213mA	2x250mA
E4209005	E4209105	2x9V	2x178mA	2x200mA
E4209007	E4209107	2x12V	2x133mA	2x160mA
E4209009	E4209109	2x15V	2x107mA	2x125mA
E4209011	E4209111	2x18V	2x89mA	2x100mA
E4209013	E4209113	2x24V	2x67mA	2x80mA

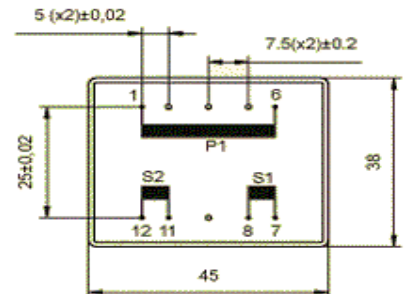

CENTER TAPPED, 3,2VA. Ta⁴⁰B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
E4095035	E4209135	2x4,5V	2x356mA	2x400mA
E4209021	E4209121	2x6V	2x267mA	2x315mA
E4209023	E4209123	2x7,5V	2x213mA	2x250mA
E4209025	E4209125	2x9V	2x178mA	2x200mA
E4209027	E4209127	2x12V	2x133mA	2x160mA
E4209029	E4209129	2x15V	2x107mA	2x125mA
E4209031	E4209131	2x18V	2x89mA	2x100mA
E4209033	E4209133	2x24V	2x67mA	2x80mA

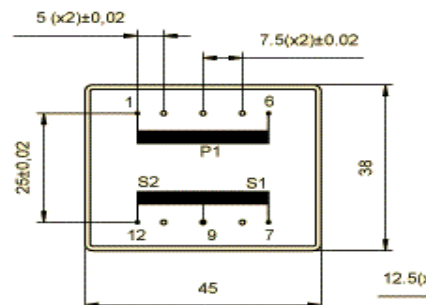

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 .