



E4215 (EI 42/14,8)

6VA - Ta40°B

weight - 205gr.




www.efiter.com

[home>>index](#)


ENCAPSULATED TRANSFORMERS

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection

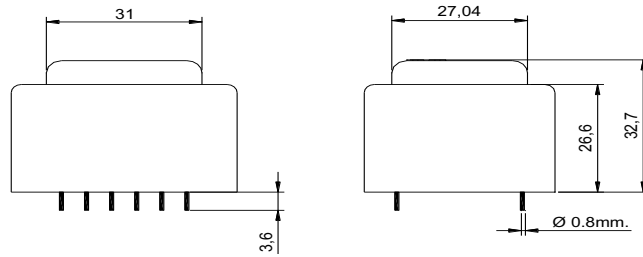


SINGLE SECONDARY, 6VA. Ta°40B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
E4215014	E4215114	4,5V	1333mA	1600mA
E4215000	E4215100	6V	1000mA	1250mA
E4215002	E4215102	7,5V	800mA	1000mA
E4215004	E4215104	9V	666mA	800mA
E4215006	E4215106	12V	500mA	630mA
E4215008	E4215108	15V	400mA	500mA
E4215010	E4215110	18V	333mA	400mA
E4215012	E4215112	24V	250mA	315mA

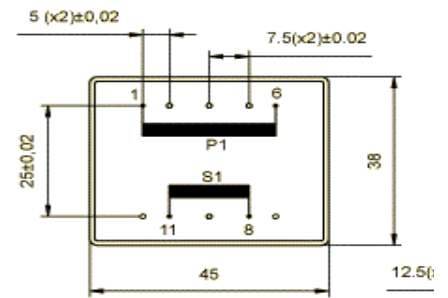


DUAL SECONDARY, 6VA. Ta°40B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
E4215015	E4215115	2x4,5V	2x666mA	2x800mA
E4215001	E4215101	2x6V	2x500mA	2x630mA
E4215003	E4215103	2x7,5V	2x400mA	2x500mA
E4215005	E4215105	2x9V	2x333mA	2x400mA
E4215007	E4215107	2x12V	2x250mA	2x315mA
E4215009	E4215109	2x15V	2x200mA	2x250mA
E4215011	E4215111	2x18V	2x166mA	2x200mA
E4215013	E4215113	2x24V	2x125mA	2x160mA

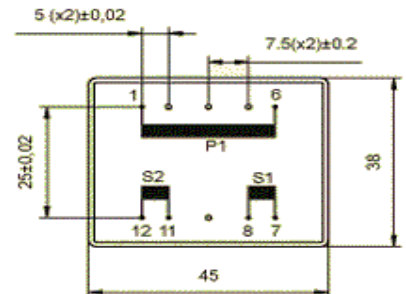

CENTER TAPPED, 6VA. Ta°40B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
E4215035	E4215135	2x4,5V	2x666mA	2x800mA
E4215021	E4215121	2x6V	2x500mA	2x630mA
E4215023	E4215123	2x7,5V	2x400mA	2x500mA
E4215025	E4215125	2x9V	2x333mA	2x400mA
E4215027	E4215127	2x12V	2x250mA	2x315mA
E4215029	E4215129	2x15V	2x200mA	2x250mA
E4215031	E4215131	2x18V	2x166mA	2x200mA
E4215033	E4215133	2x24V	2x125mA	2x160mA

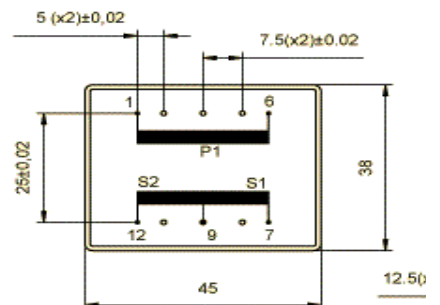

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 .