



E6026 (EI 60/25,5)

30VA - Ta40°B

weight - 675gr.




www.efiter.com

[home>>index](#)


ENCAPSULATED TRANSFORMERS

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection

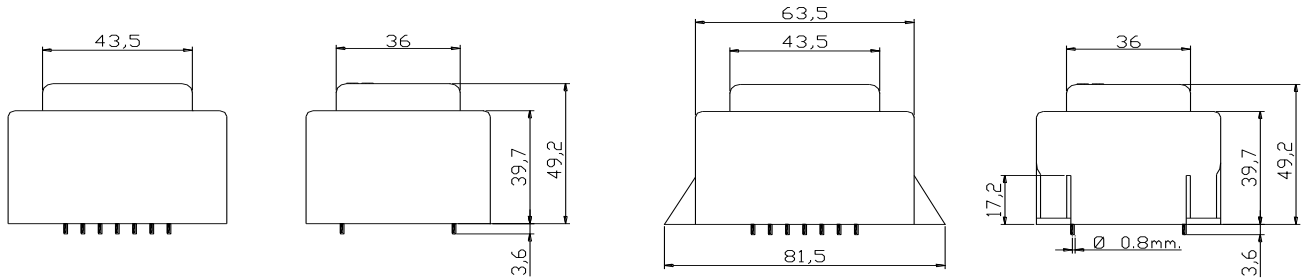


SINGLE SECONDARY, 30VA. Ta°40B

HR REFERENCE		HR REFERENCE with fixing holes		Vo/Vsec=1,2 Vo-->Is=0 Vsec --> Isec=In		Prot. Prim. 230V: 200mA/T 115V: 400mA/T
Prim. 230V	Prim. 115V	Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
E6026014	E6026114	E6026514	E6026614	4,5V	6666mA	8000mA
E6026000	E6026100	E6026500	E6026600	6V	5000mA	6000mA
E6026002	E6026102	E6026502	E6026602	7,5V	4000mA	5000mA
E6026004	E6026104	E6026504	E6026604	9V	3333mA	3150mA
E6026006	E6026106	E6026506	E6026606	12V	2500mA	3000mA
E6026008	E6026108	E6026508	E6026608	15V	2000mA	2500mA
E6026010	E6026110	E6026510	E6026610	18V	1666mA	2000mA
E6026012	E6026112	E6026512	E6026612	24V	1250mA	1600mA

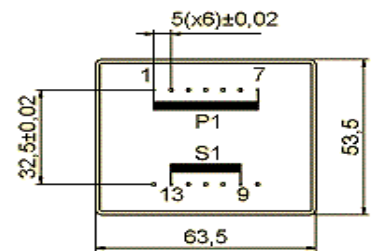


DUAL SECONDARY, 30VA. Ta°40B

HR REFERENCE		HR REFERENCE with fixing holes		Vo/Vsec=1,2 Vo-->Is=0 Vsec --> Isec=In		Prot. Prim. 230V: 200mA/T 115V: 400mA/T
Prim. 230V	Prim. 115V	Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
E6026015	E6026115	E6026515	E6026615	2x4,5V	2x3333mA	2x4000mA
E6026001	E6026101	E6026501	E6026601	2x6V	2x2500mA	2x3150mA
E6026003	E6026103	E6026503	E6026603	2x7,5V	2x2000mA	2x2500mA
E6026005	E6026105	E6026505	E6026605	2x9V	2x1666mA	2x2000mA
E6026007	E6026107	E6026507	E6026607	2x12V	2x1250mA	2x1600mA
E6026009	E6026109	E6026509	E6026609	2x15V	2x1000mA	2x1250mA
E6026011	E6026111	E6026511	E6026611	2x18V	2x833mA	2x1000mA
E6026013	E6026113	E6026513	E6026613	2x24V	2x625mA	2x800mA

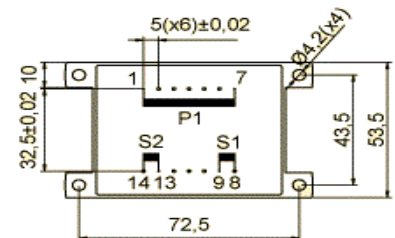

CENTER TAPPED, 30VA. Ta°40B

HR REFERENCE		HR REFERENCE with fixing holes		Vo/Vsec=1,2 Vo-->Is=0 Vsec --> Isec=In		Prot. Prim. 230V: 200mA/T 115V: 400mA/T
Prim. 230V	Prim. 115V	Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
E6026035	E6026135	E6026535	E6026635	2x4,5V	2x3333mA	2x4000mA
E6026021	E6026121	E6026521	E6026621	2x6V	2x2500mA	2x3150mA
E6026023	E6026123	E6026523	E6026623	2x7,5V	2x2000mA	2x2500mA
E6026025	E6026125	E6026525	E6026625	2x9V	2x1666mA	2x2000mA
E6026027	E6026127	E6026527	E6026627	2x12V	2x1250mA	2x1600mA
E6026029	E6026129	E6026529	E6026629	2x15V	2x1000mA	2x1250mA
E6026031	E6026131	E6026531	E6026631	2x18V	2x833mA	2x1000mA
E6026033	E6026133	E6026533	E6026633	2x24V	2x625mA	2x800mA

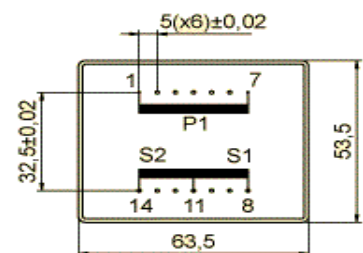

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 .