




S4817 (EI 48)

8,0VA - Ta70°C

Dim:40x48x34,8mm

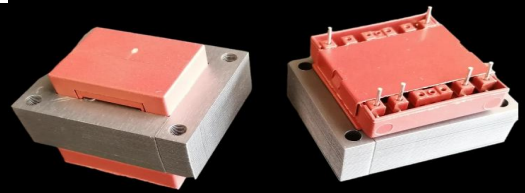


OPEN FRAME TRANSFORMERS

www.efiter.com


[home>>index](#)

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection

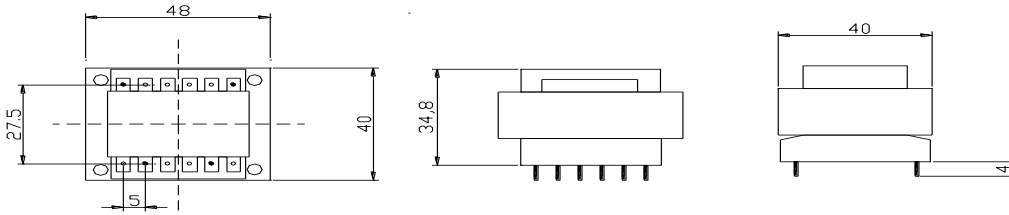


SINGLE SECONDARY, 8,0VA. Ta70°C

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
S4810564	S4817164	4,5V	1778mA	1800mA
S4817050	S4817150	6V	1333mA	1450mA
S4817052	S4817152	7,5V	1067mA	1100mA
S4817054	S4817154	9V	889mA	900mA
S4817056	S4817156	12V	667mA	675mA
S4817058	S4817158	15V	533mA	550mA
S4817060	S4817160	18V	444mA	475mA
S4817070	S4817170	20V	400mA	450mA
S4817062	S4817172	24V	333mA	375mA

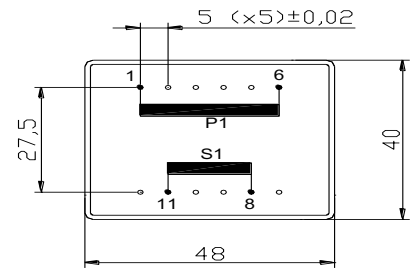


DUAL SECONDARY, 8,0VA. Ta70°C

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
S4817065	S4817165	2x4,5V	2x889mA	2x900mA
S4817051	S4817151	2x6V	2x667mA	2x700mA
S4817053	S4817153	2x7,5V	2x533mA	2x575mA
S4817055	S4817155	2x9V	2x444mA	2x500mA
S4817057	S4817157	2x12V	2x333mA	2x350mA
S4817059	S4817159	2x15V	2x267mA	2x275mA
S4817061	S4817161	2x18V	2x222mA	2x250mA
S4817069	S4817169	2x20V	2x200mA	2x225mA
S4817063	S4817163	2x24V	2x167mA	2x175mA

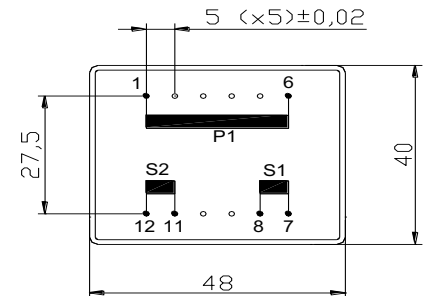

CENTER TAPPED, 8,0VA. Ta70°C

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
S4825085	S4817185	2x4,5V	2x889mA	2x900mA
S4817071	S4817171	2x6V	2x667mA	2x700mA
S4817073	S4817173	2x7,5V	2x533mA	2x575mA
S4817075	S4817175	2x9V	2x444mA	2x500mA
S4817077	S4817177	2x12V	2x333mA	2x350mA
S4817079	S4817179	2x15V	2x267mA	2x275mA
S4817081	S4817181	2x18V	2x222mA	2x250mA
S4817089	S4817189	2x20V	2x200mA	2x225mA
S4817083	S4817183	2x24V	2x167mA	2x175mA

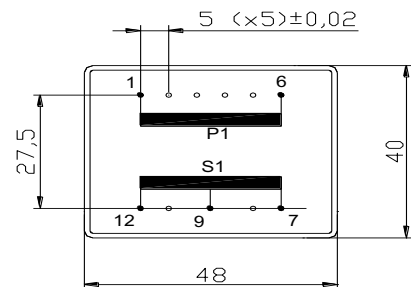

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085