




S5419 (EI 54)

16VA - Ta40°B

Dim:45x54x38,8mm


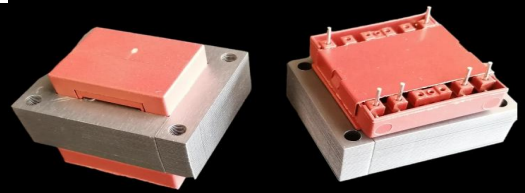


OPEN FRAME TRANSFORMERS

www.efiter.com


home>>index

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085 · External protection

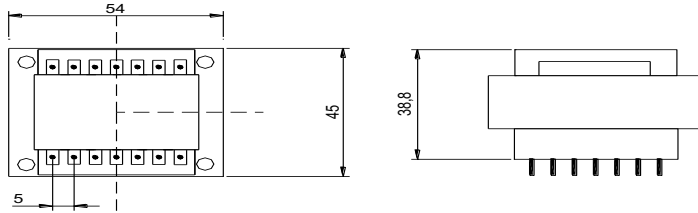


SINGLE SECONDARY, 16VA. Ta°40B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
S5419014	S5419114	4,5V	3556mA	3600mA
S5419000	S5419100	6V	2667mA	2700mA
S5419002	S5419102	7,5V	2133mA	2250mA
S5419004	S5419104	9V	1778mA	1800mA
S5419006	S5419106	12V	1333mA	1400mA
S5419008	S5419108	15V	1067mA	1150mA
S5419010	S5419110	18V	889mA	950mA
S5419020	S5419120	20V	800mA	850mA
S5419012	S5419112	24V	667mA	700mA

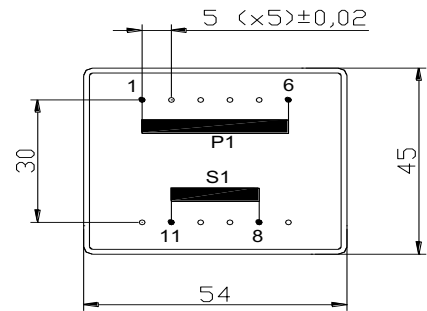


DUAL SECONDARY, 16VA. Ta°40B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
S5419015	S5419115	2x4,5V	2x1778mA	2x1800mA
S5419001	S5419101	2x6V	2x1333mA	2x1375mA
S5419003	S5419103	2x7,5V	2x1067mA	2x1100mA
S5419005	S5419105	2x9V	2x889mA	2x200mA
S5419007	S5419107	2x12V	2x667mA	2x700mA
S5419009	S5419109	2x15V	2x533mA	2x575mA
S5419011	S5419111	2x18V	2x444mA	2x500mA
S5419019	S5419119	2x20V	2x400mA	2x450mA
S5419013	S5419113	2x24V	2x333mA	2x375mA

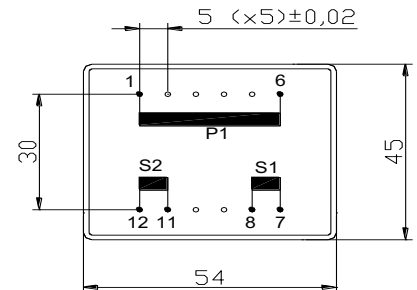

CENTER TAPPED, 16VA. Ta°40B

HR REFERENCE		Vo/Vsec=1,3 Vo → Is=0 Vsec → Isec=In		Prot. Prim. 230V: 50mA/T 115V: 100mA/T
Prim. 230V	Prim. 115V	Vsec	Isec	Prot. Sec. mA/F
S5419035	S5419135	2x4,5V	2x1778mA	2x1800mA
S5419021	S5419121	2x6V	2x1333mA	2x1375mA
S5419023	S5419123	2x7,5V	2x1067mA	2x1100mA
S5419025	S5419125	2x9V	2x889mA	2x200mA
S5419027	S5419127	2x12V	2x667mA	2x700mA
S5419029	S5419129	2x15V	2x533mA	2x575mA
S5419031	S5419131	2x18V	2x444mA	2x500mA
S5419039	S5419139	2x20V	2x400mA	2x450mA
S5419033	S5419133	2x24V	2x333mA	2x375mA

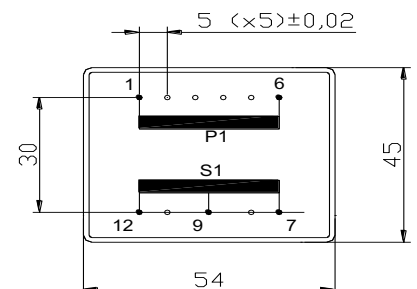

According EN61558, EN60590, EN60472, UL506, UL1585, UL5085